



PRODUCT DATA SHEET

H9395

Werlatone® High Power 180° RF Hybrid Combiners/Dividers balance traditional technologies with disruptive microwave techniques. The outcome is a microwave component which provides an order of magnitude improvement over current capabilities. Our newest line of high power, patented 180° RF Hybrid Combiners/Dividers provides an incredible 5:1 bandwidth, while exhibiting exceptionally low loss and superior port-to-port isolation.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency: 350 - 1000 MHz
Power: 250 W CW
Insertion Loss: 0.3 dB Max.
VSWR: 1.30:1 Max.
Phase Balance: $180^\circ \pm 7^\circ$ Max.
Amplitude Balance: ± 0.4 dB Max.
Isolation: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Size: 3.5 x 4.28 x 1.06"

Connector Configurations:

Model	Sum Port (J1)	Inputs/Outputs (J2,J3)	Diff. Port (J4)
H9395-10	N Female	N Female	N Female


Werlatone's standard line of High Power 180° RF Hybrid Combiners/Dividers covers multiple octaves within a microwave device. Low frequency 180° Hybrid Combiner/Dividers employ proprietary ferrite transmission line techniques, similar to our 0° Combiners/Dividers. Insertion loss in both sum and difference ports is minimal, allowing the hybrid to handle high power over its frequency range. Custom requirements are welcome.



WERLATONE

Model H9395

180° Hybrids Connectorized




PRODUCT DATA SHEET


H9395

Performance Data (Specifications subject to change without notice):


Coupling:

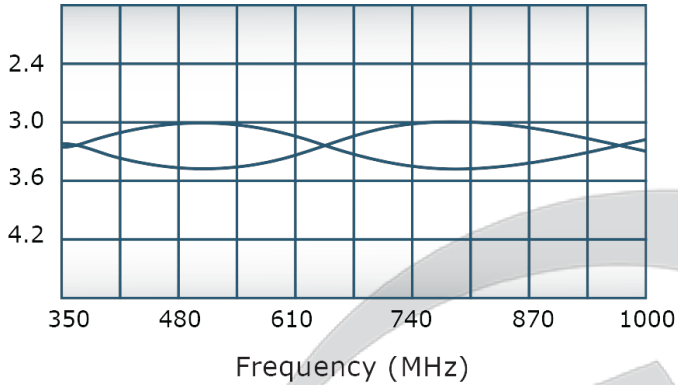


VSWR:

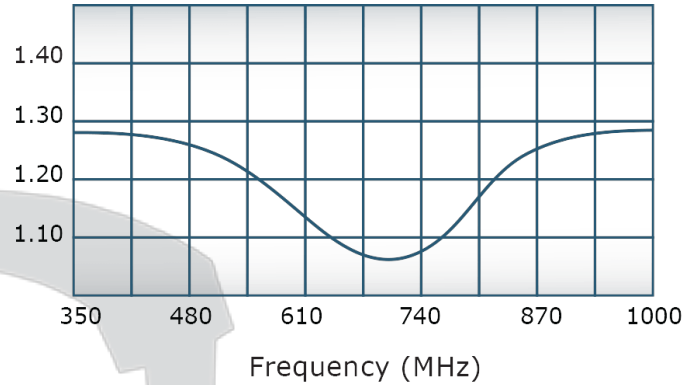

Isolation:

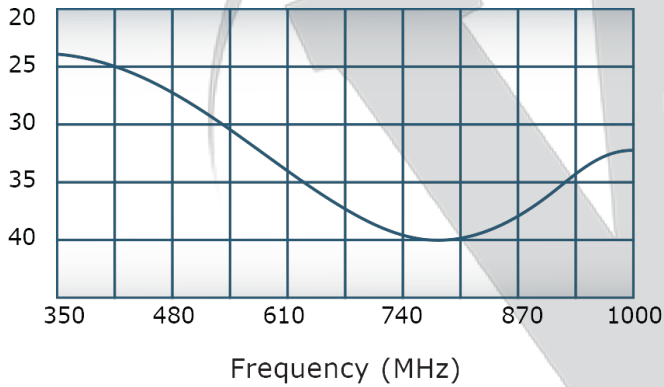


Phase Balance:

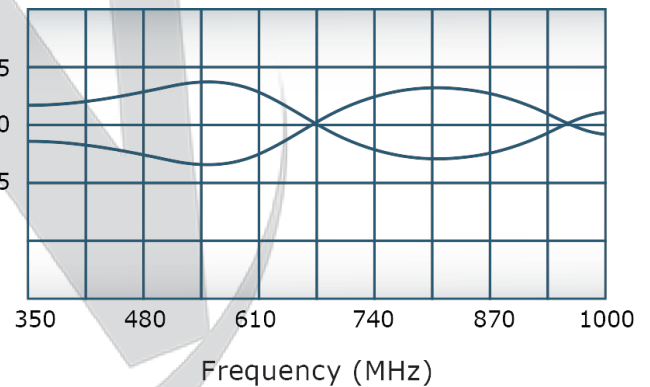

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

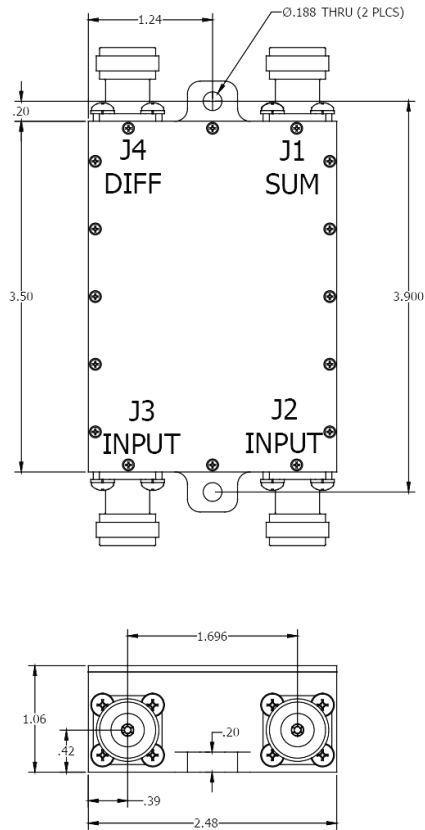

NOTES: UNLESS OTHERWISE SPECIFIED

1. MAT'L: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER-DTL-5541F TYPE 1 CLASS 3 (YELLOW IRIDITE)
3. CONNECTORS: N (FEMALE)

	A	B	C	D
1	REVISION HISTORY			
2	REV	REVISION RECORD	DATE	APPROVED
3	-	INITIAL RLS	5/23/2012	BW
4				
5				
6				

UNLESS OTHERWISE SPECIFIED		DWN	DATE	 WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563
• INTERPRET DRAWING IAW MIL-STD-100		NH	05/23/12		
• DIMENSIONING PER ASME Y14.5M-2009		CHK	DATE	TITLE	
• PARENTHESES INFO FOR REF ONLY		BW	05/23/12		
• DIMENSIONS ARE IN INCHES		ENGR	DATE	OUTLINE	
• DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		BW	05/23/12		
• TOLERANCES: ANGLES ± 2° 3 PL ± .005 2 PL ± .015		MFR	DATE	SIZE CAGE CODE DWG NO	
THIRD ANGLE PROJECTION 		QA	DATE		REV
		RLSE	DATE	A 28812 20904-500	-
				SCALE 1:2	SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com