



WERLATONE

Model QH11015

90° Hybrids Connectorized



PRODUCT DATA SHEET

QH11015

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power

Wide Bandwidths

Small Size

Connectorized

Drop-In & Surface Mount

Electrical Specifications:

Frequency:	20-1000 MHz
Power:	300 W CW
Insertion Loss:	0.8 dB Max.
VSWR:	1.45:1 Max.
Phase Balance:	90° \pm 10° Max.
Amplitude Balance:	\pm 0.25 dB Max.
Isolation:	20 dB Min.

Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Size:	4.10 x 3.10 x 1.25"

Connector Configurations:

Model	Sum Port (J1)	Inputs (J2,J3)	Ext. Load Port
QH11015-10	N Female	N Female	Not Applicable
QH11015-12	N Female	SMA	Not Applicable

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



WERLATONE

Model QH11015

90° Hybrids Connectorized




PRODUCT DATA SHEET

QH11015

Performance Data (Specifications subject to change without notice):

Graph 1: VSWR, Graph 2: Coupling, Graph 3: Phase Balance, Graph 4: Isolation

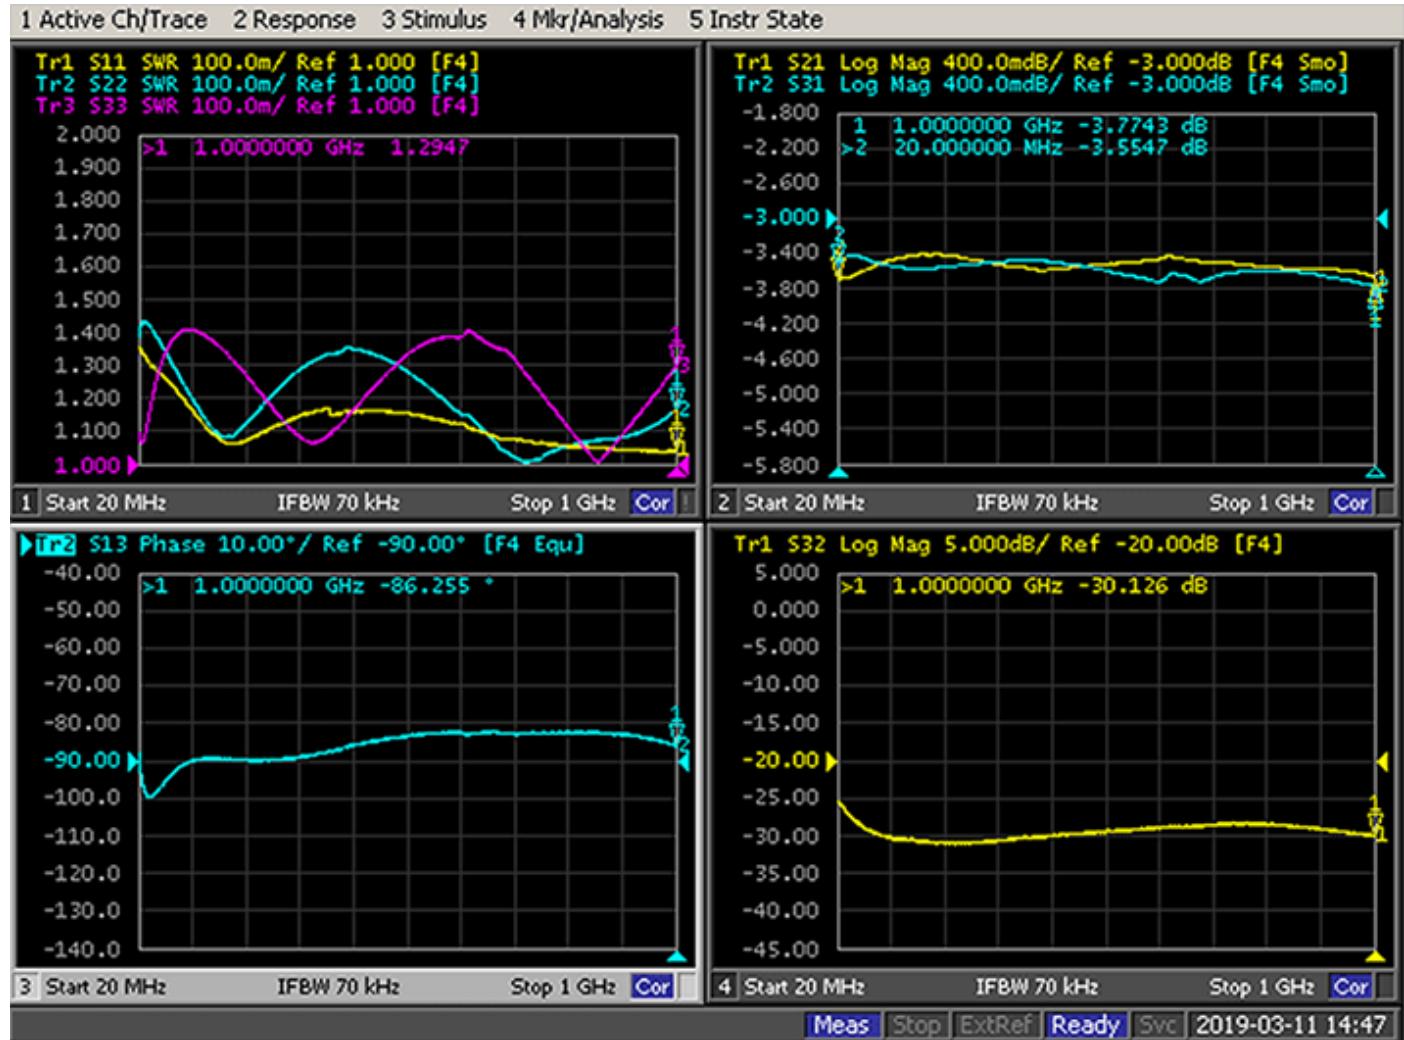

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

4

3


2

1

RESTRICTION ON USE, DUPLICATION OR
DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information
which is the sole property of Werlatone, Inc.

REVISION HISTORY

REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	2/2/2017	PR

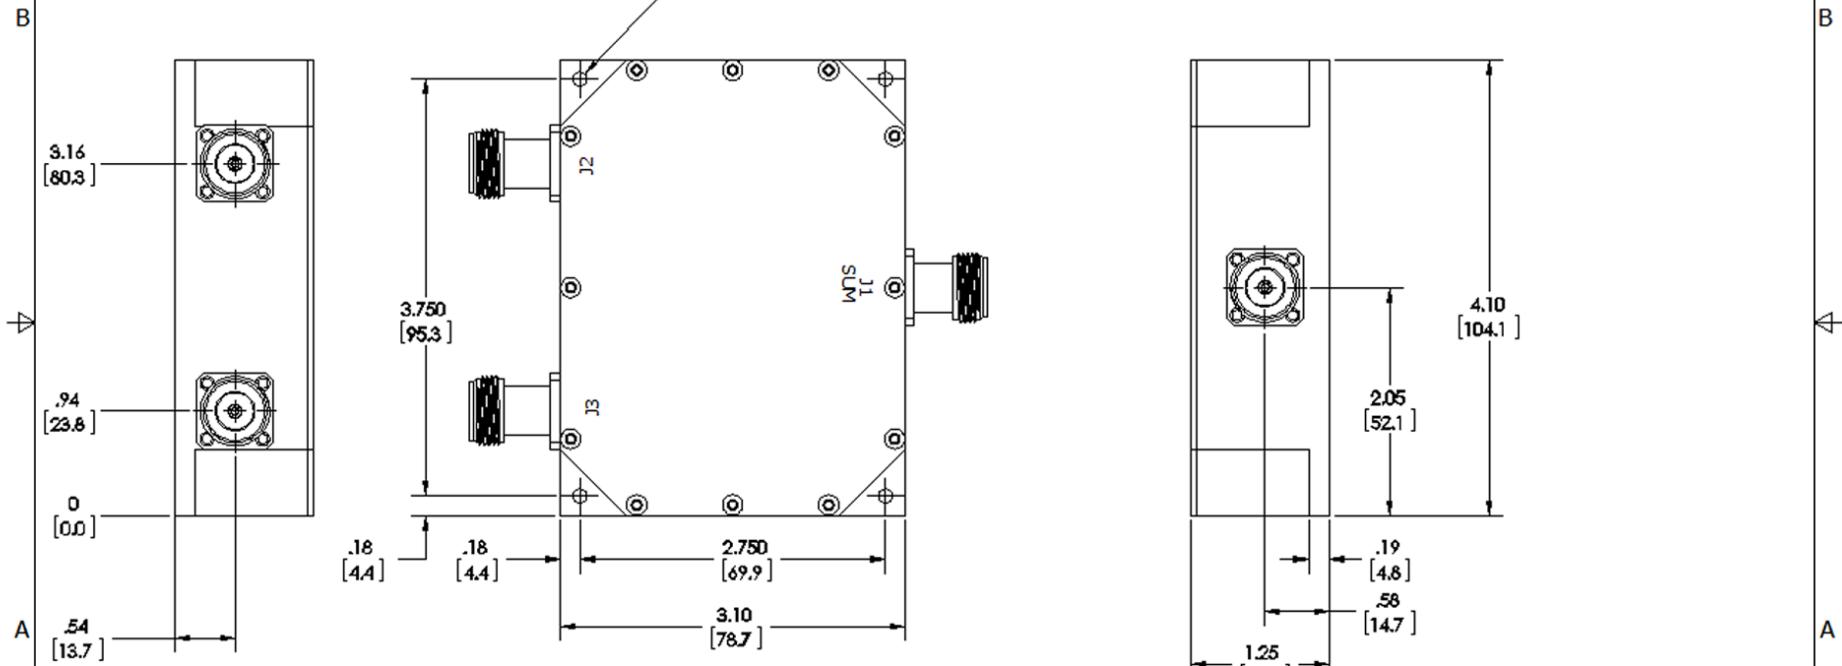

NOTES: UNLESS OTHERWISE NOTED
 1. ALUMINUM 6061-T6
 2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)
 3. CONNECTORS: N (FEMALE)

UNLESS OTHERWISE SPECIFIED		REV.	DATE	WNLATONE SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563
PLP	2/2/2017	CHL	DATE			
PR	2/2/2017	PLG	DATE			
PR	DATE	PLG	DATE			
CA	DATE	CA	DATE			
CA	DATE	CA	DATE			
APPLICATION	THIRD ANGLE PROJECTION	SCALE	DATE	REV.		
CH11015-10		B	28812 21505-500	-		
		1:1				SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com