



## PRODUCT DATA SHEET

QH8756

### Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

### Features:

High Power      Wide Bandwidths      Small Size      Connectorized      Drop-In & Surface Mount

### Electrical Specifications:

Frequency: 100 - 500 MHz  
Power: 2000 W CW  
Insertion Loss: 0.35 dB Max.  
VSWR: 1.30:1 Max.  
Phase Balance: 90° ± 3° Max.  
Amplitude Balance: ± 0.6 dB Max.  
Isolation: 18 dB Min.

### Mechanical Specifications:

Type: Connectorized  
Material: Aluminum 6061-T6  
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available  
Operating Temperature: -55°C to +75°C  
Storage Temperature: -60°C to +85°C  
Weight: 7 lbs.  
Size: 21.8 x 2.2 x 2.0"

### Connector Configurations:

| Model      | Sum Port (J1) | 0°, 90° (J2,J3) | Iso. Load Port |
|------------|---------------|-----------------|----------------|
| QH8756-41  | SC Female     | N Female        | N Female       |
| QH8756-650 | SC Female     | SC Female       | N Female       |

**Werlatone's** breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.



# WERLATONE

Model QH8756

90° Hybrids Connectorized




## PRODUCT DATA SHEET


QH8756

### Performance Data (Specifications subject to change without notice):


Coupling:

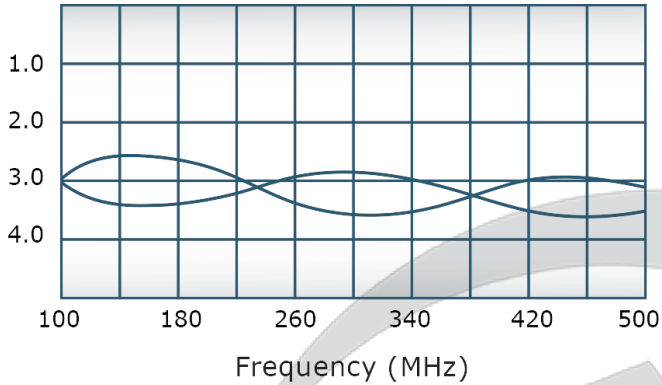


VSWR:

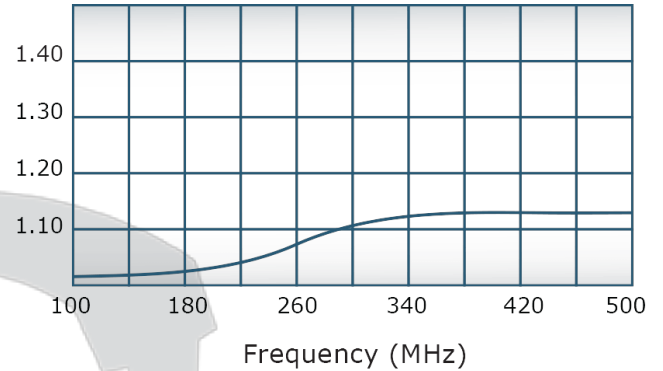

Isolation:

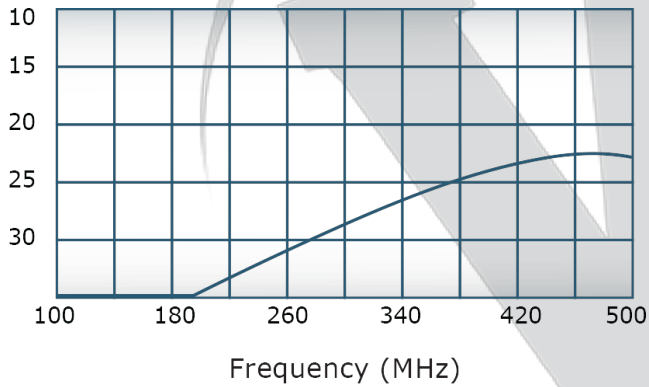

Phase Balance:

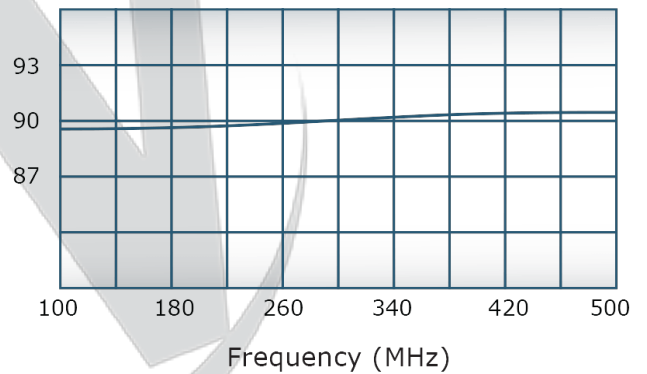

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

