



PRODUCT DATA SHEET

QH8859

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Connectorized Drop-In & Surface Mount

Electrical Specifications:

Frequency: 80 - 1000 MHz
Power: 250 W CW
Insertion Loss: 0.65 dB Max.
VSWR: 1.40:1 Max.
Phase Balance: $90^\circ \pm 6^\circ$ Max.
Amplitude Balance: ± 1.0 dB Max.
Isolation: 16 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Weight: 14.2 oz.
Size: 3.5 x 3.2 x 1.06"

Connector Configurations:

Model	Sum Port (J1)	0°, -90° (J2,J3)	ISO Port (J4)
QH8859-10	N Female	N Female	N Female
QH8859-12	N Female	N Female	SMA
QH8859-102	SMA	SMA	SMA
QH8859-113	BNC	BNC	BNC

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



WERLATONE

Model QH8859
90° Hybrids Connectorized




PRODUCT DATA SHEET


QH8859

Performance Data (Specifications subject to change without notice):


Coupling:

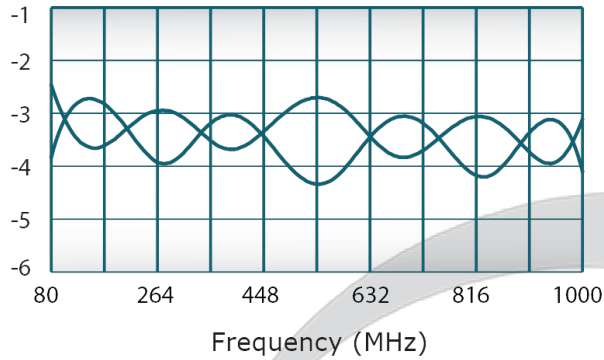


VSWR:

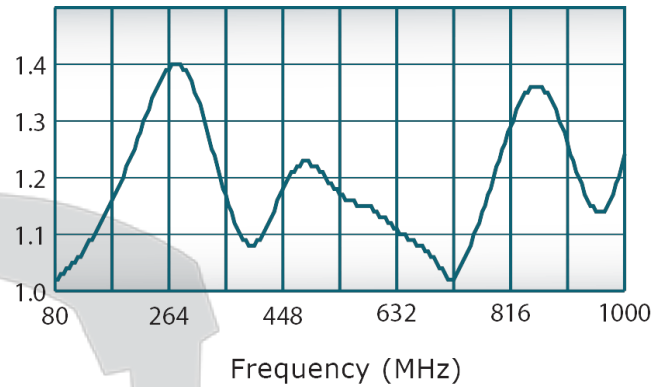

Isolation:

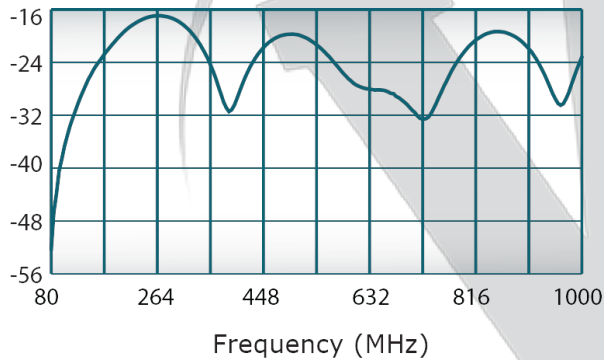

Phase Balance:



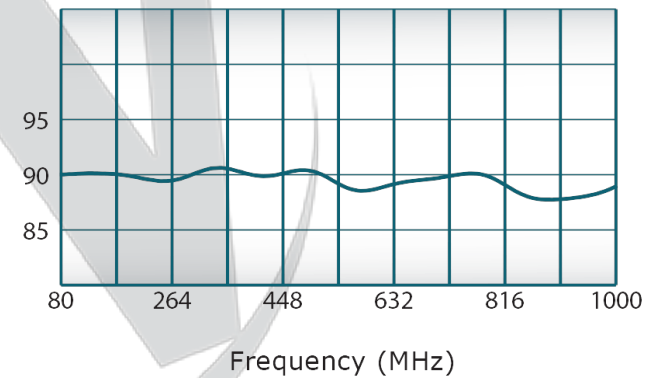


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY					
DATE	REV	REVISION RECORD	AUTH	CHK	APPV
2/21/2011	-	INITIAL RELEASE	NH	BW	BW

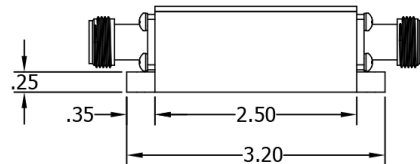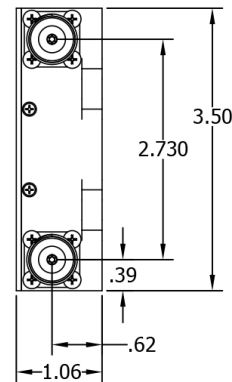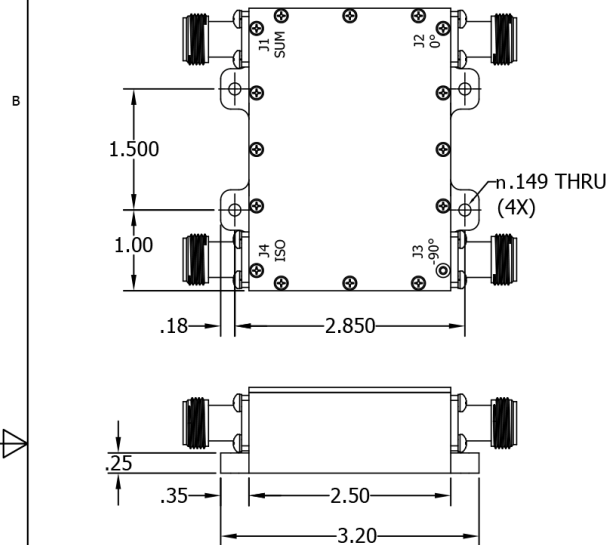

J1	J2	J3	J4
Sum (S)	-3 dB Q	-3 dB Q-90	Isolated (Δ)
-3 dB Q	Sum (S)	Isolated (Δ)	-3 dB Q-90
-3 dB Q-90	Isolated (Δ)	Sum (S)	-3 dB Q
Isolated (Δ)	-3 dB Q-90	-3 dB Q	Sum (S)

UNLESS OTHERWISE SPECIFIED		DWN	DATE	W WERLATONE SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563	
INTERPRET DRAWING IAW MIL-STD-100		NH	02/21/11	TITLE	OUTLINE		
DIMENSIONING PER ASME Y14.5M-2009		CHK	DATE				
PARAMETRIC INFO FOR REF ONLY		BW	02/21/11				
DIMENSIONS ARE IN INCHES		ENGR	DATE				
TOLERANCES: ANGLE ± 2°		BW	02/21/11				
3 PL DECIMALS ± .005		QA	DATE	USED ON			
2 PL DECIMALS ± .015		RLSE	DATE	SIZE	CAGE CODE	DWG NO	REV
THIRD ANGLE PROJECTION 				A	28812	20725-500	-
				SCALE			SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com