

## PRODUCT DATA SHEET

D9215

**Werlatone® Mismatch Tolerant®** High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

### Features:

High Power      Wide Bandwidths      Small Size      High Isolation      Custom Designs Available

### Electrical Specifications:

Frequency: 2000 - 4000 MHz  
Power: 200 W CW  
Insertion Loss: 0.35 dB Max.  
VSWR: 1.40:1 Max.  
Phase Balance:  $\pm 5^\circ$  Max.  
Amplitude Balance: 0.25 dB Max.  
Isolation: 15 dB Min.


### Mechanical Specifications:

Type: Connectorized  
Material: Aluminum 6061-T6  
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available  
Operating Temperature: -55°C to +75°C  
Storage Temperature: -60°C to +85°C  
Weight: 9 oz.  
Size: 3.2 x 2.3 x 0.87"

### Connector Configurations:

| Model     | Sum Port (J1) | Input/Output (J2) | Input/Output (J3) |
|-----------|---------------|-------------------|-------------------|
| D9215-10  | N Female      | N Female          | N Female          |
| D9215-12  | N Female      | SMA               | SMA               |
| D9215-102 | SMA           | SMA               | SMA               |

**When specified, Werlatone® High Power Combiners and RF Dividers** will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.




## PRODUCT DATA SHEET


D9215

### Performance Data (Specifications subject to change without notice):


Insertion Loss:

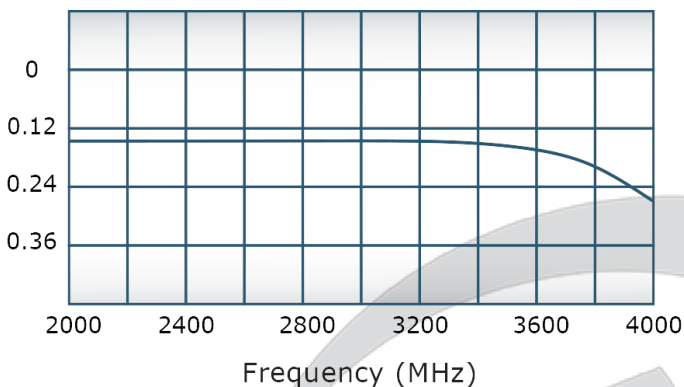


VSWR:

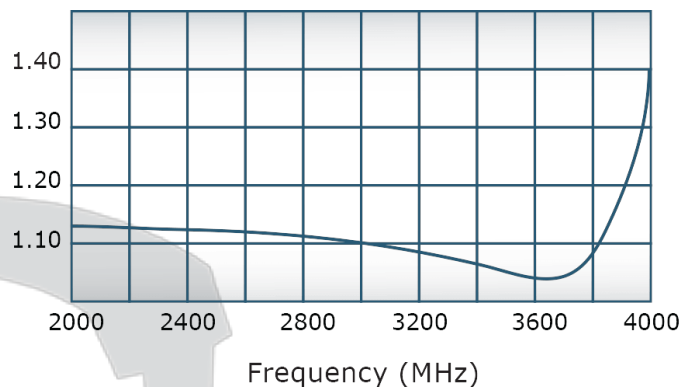


Isolation:

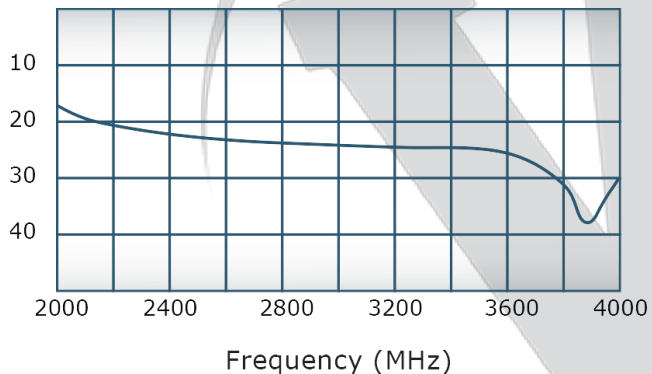

Phase Balance:

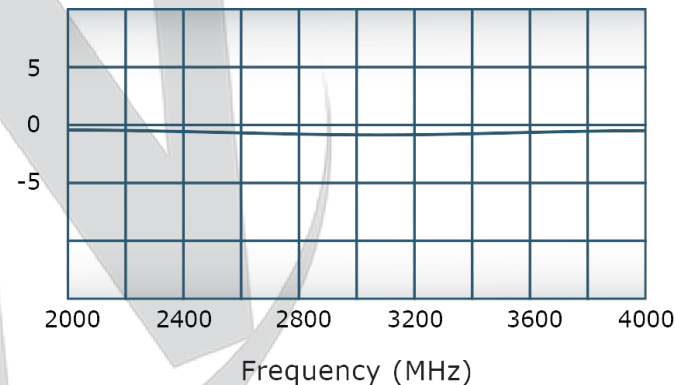

**RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION**  
This document contains proprietary information  
which is the sole property of Werlatone, Inc.

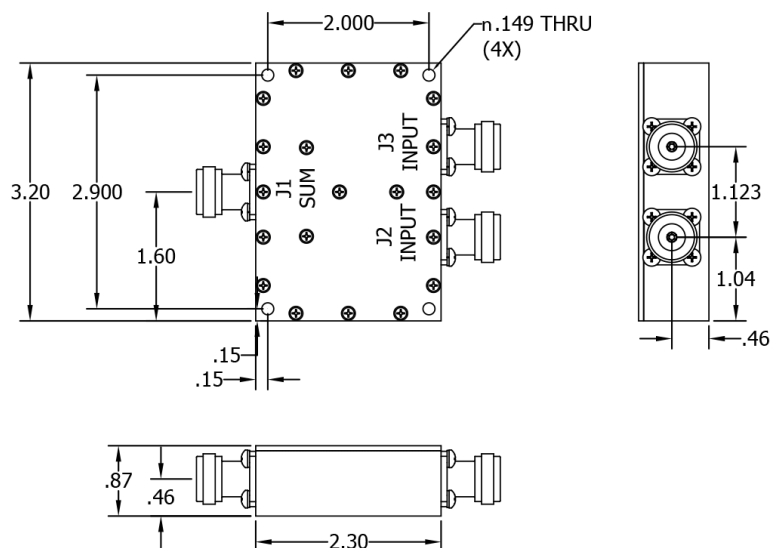

| REVISION HISTORY |                 |           |          |
|------------------|-----------------|-----------|----------|
| REV              | REVISION RECORD | DATE      | APPROVED |
| -                | INITIAL RLS     | 2/22/2012 | BW       |
|                  |                 |           |          |
|                  |                 |           |          |
|                  |                 |           |          |

|             |         |                                                                                                              |  |      |           |                                                                                                              |           |              |                                          |  |
|-------------|---------|--------------------------------------------------------------------------------------------------------------|--|------|-----------|--------------------------------------------------------------------------------------------------------------|-----------|--------------|------------------------------------------|--|
|             |         | UNLESS OTHERWISE SPECIFIED                                                                                   |  | DWN  | DATE      |  WERLATONE   SINCE 1965 |           |              | 17 Jon Barrett Rd<br>Patterson, NY 12563 |  |
|             |         | • INTERPRET DRAWING IAW MIL-STD-100                                                                          |  | NH   | 2/22/2012 |                         |           |              |                                          |  |
|             |         | • DIMENSIONING PER ASME Y14.5M-2009                                                                          |  | CHK  | DATE      |                                                                                                              |           |              |                                          |  |
|             |         | • PARENTHETICAL INFO FOR REF ONLY                                                                            |  | BW   | 2/22/2012 |                                                                                                              | TITLE     |              |                                          |  |
|             |         | • DIMENSIONS ARE IN INCHES                                                                                   |  | ENGR | DATE      |                                                                                                              |           |              |                                          |  |
|             |         | • DIMENSIONAL LIMITS APPLY BEFORE PROCESSES                                                                  |  | BW   | 2/22/2012 | OUTLINE                                                                                                      |           |              |                                          |  |
|             |         | • TOLERANCES: ANGLES ± .2°<br>.00X ± .005<br>XX ± .015                                                       |  | MFGR | DATE      |                                                                                                              |           |              |                                          |  |
|             |         | • HOLE TOLERANCES +.004/-0.01                                                                                |  | QA   | DATE      | SIZE                                                                                                         | CAGE CODE | DWG NO       | REV                                      |  |
| NEXT ASSY   | USED ON | • REMOVE ALL BURRS AND SHARP EDGES<br>R.01 MAX                                                               |  |      |           | A                                                                                                            | 28812     | 20842-500    | -                                        |  |
| APPLICATION |         | • CONCENTRICITY MACHINED DIA : .002 FIM                                                                      |  | RLSE | DATE      | SCALE                                                                                                        |           | SHEET 1 OF 1 |                                          |  |
|             |         | • MACHINE TOOL MISMATCH .003 MAX                                                                             |  |      |           |                                                                                                              |           |              |                                          |  |
|             |         | THIRD ANGLE PROJECTION  |  |      |           |                                                                                                              |           |              |                                          |  |

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com