



PRODUCT DATA SHEET

D9853

Werlatone® Mismatch Tolerant® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

Features:

High Power Wide Bandwidths Small Size High Isolation Custom Designs Available

Electrical Specifications:

Frequency: 700 - 2700 MHz
Power: 200 W CW
Insertion Loss: 0.5 dB Max.
VSWR: 1.30:1 Max.
Phase Balance: $\pm 5^\circ$ Max.
Amplitude Balance: 0.25 dB Max.
Isolation: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Size: 4.7 x 2.0 x 0.8"

Connector Configurations:

Model	Sum Port (J1)	Input/Output (J2)	Input/Output (J3)
D9853-10	N Female	N Female	N Female
D9853-12	N Female	SMA	SMA
D9853-102	SMA	SMA	SMA

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.



WERLATONE

Model D9853

Combiners In-Phase Connectorized




PRODUCT DATA SHEET


D9853

Performance Data (Specifications subject to change without notice):


Insertion Loss:

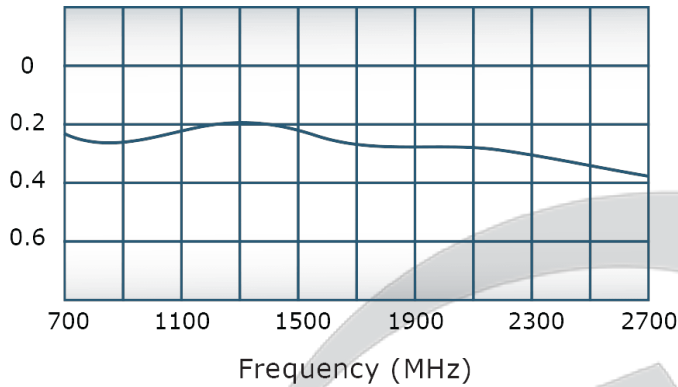


VSWR:

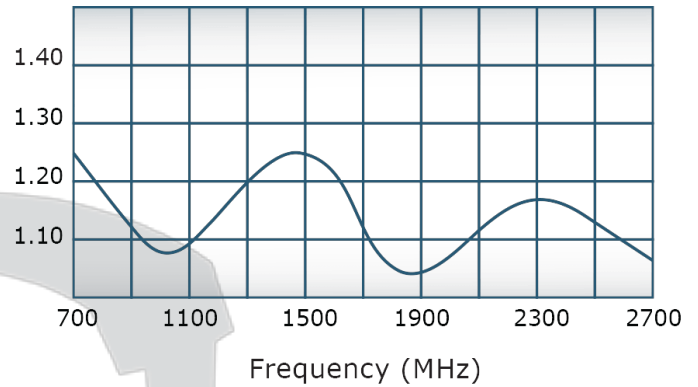

Isolation:

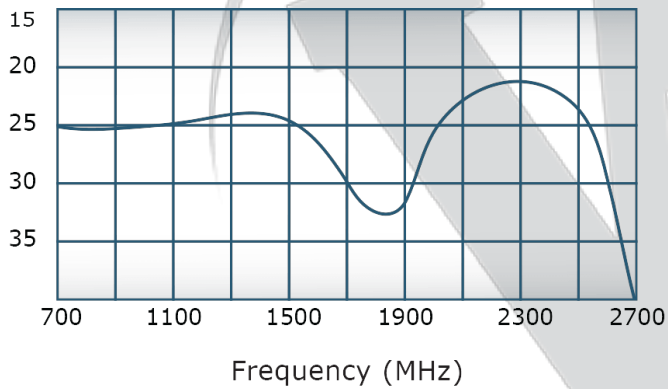


Phase Balance:

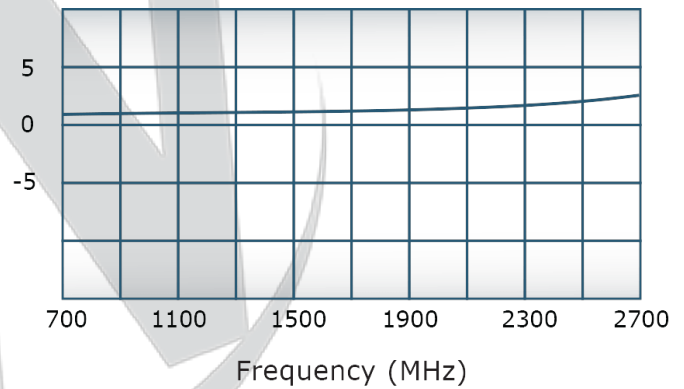

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

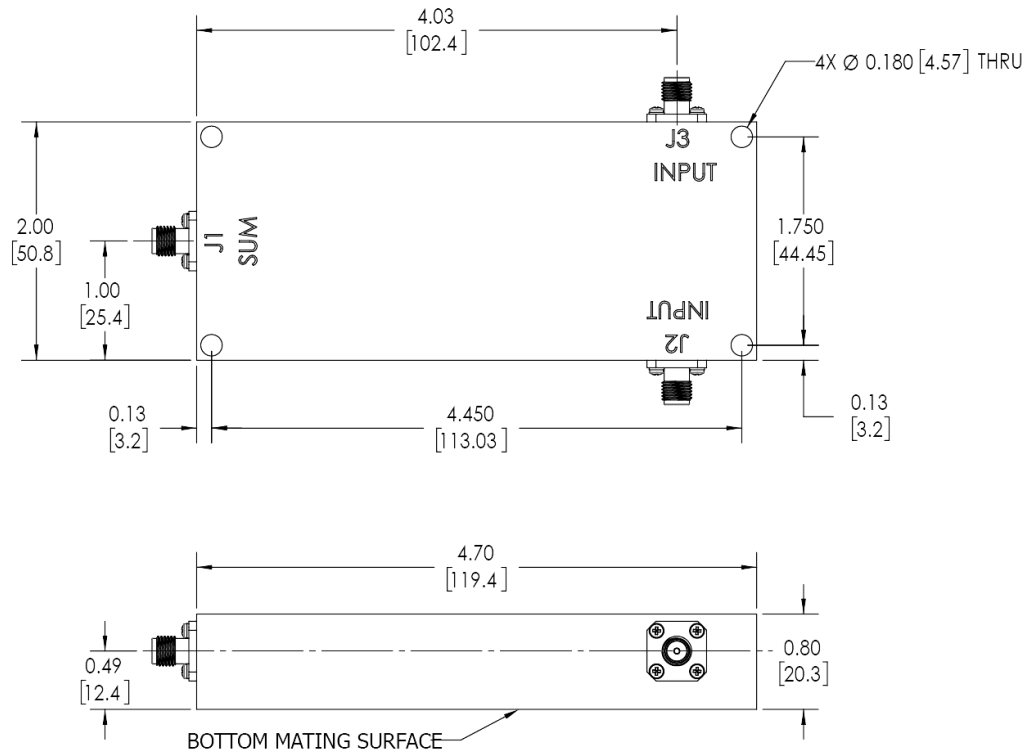

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 4961	09/10/09	BW
B	ECN 9174	09/21/16	CS
C	ECN 9696	11/20/2019	RB

- NOTES: UNLESS OTHERWISE SPECIFIED**
 1. **MATERIAL: ALUMINUM 6061-T6**
 2. **FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
 3. **CONNECTORS:**
J1-J3: SMA FEMALE

UNLESS OTHERWISE SPECIFIED		DWN	DATE	 WERLATONE [®] SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563		
INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100 DIMENSIONS PER ASME Y14.5M-2009 PARENTHESES FOR REFERENCE ONLY DIMENSIONS ARE IN INCHES DIMENSIONAL LIMITS APPLY BEFORE FINISHES TOLERANCES: ANGLES ± 2° 3 PL ± .005 [13] 2 PL ± .015 [38] REMOVE ALL BURRS AND SHARP EDGES R.01 MAX CONCENTRICITY MACHINED DIA. .002 FIM MACHINE TOOL MATCH .003 FIM		SD	11/20/2019				
NEXT ASSY		CHK	DATE	TITLE			
USED ON		CS	11/20/2019				
APPLICATION		ENGR	DATE	OUTLINE			
THIRD ANGLE PROJECTION 		INPR	DATE				
		QA	DATE	SIZE CAGE CODE DWG NO.			REV
		RLSE	DATE	B 20291-500			C
				SCALE 1:1	SHEET 1 OF 1		

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com