



PRODUCT DATA SHEET

WPM11326

Instantaneous & Simultaneous

- Local and/or Remote Monitoring
- Forward Power Reading/Monitoring (Watts or dBm)
- Reverse Power Reading/Monitoring (Watts or dBm)
- VSWR Readings (Watts, Return Loss, Rho)

VSWR Alarm

- Customer can set up audio/visual alarm via relay contacts.
- Signal sent to closed loop.

Temperature Monitoring (with alarm)

- One sensor, internal measurement, within Power Meter.
- One sensor, external measurement, to be placed by customer.

General Purpose Inputs (6 ea) Multiple Use

- Track switch closures (assign to interlock group).
- Trigger alarm relay (sends email alert).
- RF presence status/alarm (safety feature).
- Alarm, activated switch.

Accessories:

- Single Channel and Multi-Channel Displays
- RF Digital Dashboard Spreadsheet Software, (Simultaneously Monitor Outputs of 30+ Power Meters)
- PC Based Graphical User Interface Windows XP/7/8/10 Compatible

Accuracy:

- $\pm 2\%$ to Customer Calibration Standard, at preselected frequencies.
- $\pm 5\%$ over a Multi-Octave Bandwidth
- Werlatone Calibration Traceable to (NIST) National Institute of Standards and Technology

Power:

- AC Power Adapter (100/240 50-60 Hertz V AC)
- POE (Passive Over Ethernet, Optional POE Injector Kit Available)
- Via RS485 (Via Single Channel or Multi-Channel Displays)

Interface (Via):

- TCP/IP - SNMP and Browser Interface via Local Area Network
- RS232, Serial
- RS485 - Form Addressable Serial Network
- User ID and Password Protected for Access and Control
- Multiple units can be Networked and Simultaneously Monitored On-Site or Remotely (TCP/IP/SNMP/Serial)

RoHS Compliant Design Available
Custom Connector Configurations Available

Electrical Specifications:

Frequency: 2 - 50 MHz
Power: 10,000 W CW


Mechanical Specifications:

Type: Connectorized
Operating Temperature: -55°C to $+75^{\circ}\text{C}$
Storage Temperature: -60°C to $+85^{\circ}\text{C}$


Connector Configurations:

Model	Input(J1)	Output(J2)
WPM11326-83	1 5/8" EIA	1 5/8" EIA


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

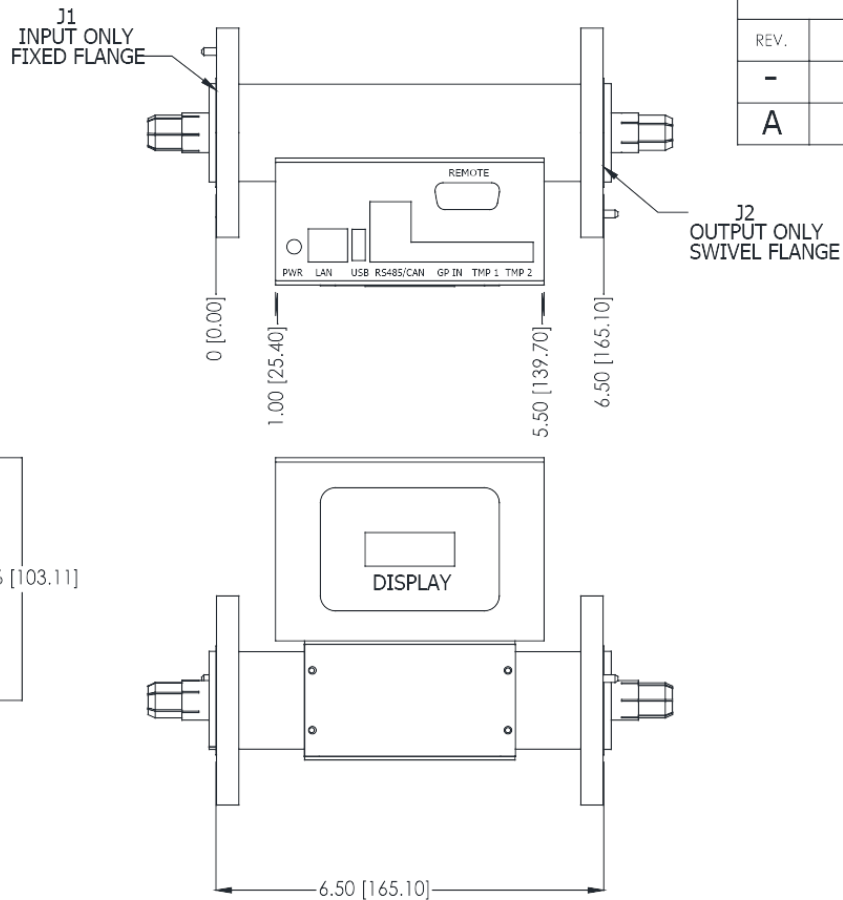

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	7/6/2020	CS
A	ECN 9965	9/29/2020	CS



VIEW FOR REFERENCE ONLY

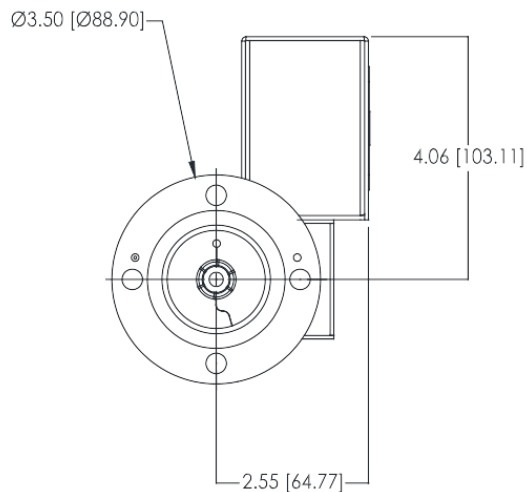

NOTES: UNLESS OTHERWISE SPECIFIED
1. CONNECTORS: J1-J2 1 5/8 (EIA)

		• UNLESS OTHERWISE SPECIFIED		DWN	DATE	 WERLATON SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563			
		• INTEREST DRAWING HOW HLT STD-100		PLP	7/24/2015				
		• CONFORMANCE PER AISC 360-2005		CNR	DATE				
		• PARALLEL TRIM END FOR REF ONLY		CS	7/6/2020				
		• DIMENSIONS ARE IN INCHES [mm]			TITLE				
		• CONNECTIONS APPLY BEFORE PROCESSES		ENGR	DATE				
		• TOLERANCES:				OUTLINE			
		ANGLES ± 2°							
		3 PL ± .005 [1.3]		RFR	DATE				
		4 PL ± .012 [1.4]							
		• REMOVE ALL BURRS AND SHARP EDGES R.U.M MAX		QA	DATE	SIZE	CAGE CODE	DWG NO	REV
		• CORRUPTIBILITY MAXED SAE .300 PHF				B	28812	21340-505	A
		• MACHINE TOOL PRECISION .003 MAX		R/SB	DATE	SCALE	1:2	SHEET 1 OF 1	
NEXT ASSY		USED ON							
APPLICATION		THIRD ANGLE PROJECTION 							

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com