



PRODUCT DATA SHEET

WPM11667

Instantaneous & Simultaneous

- Local and/or Remote Monitoring
- Forward Power Reading/Monitoring (Watts or dBm)
- Reverse Power Reading/Monitoring (Watts or dBm)
- VSWR Readings (Watts, Return Loss, Rho)

VSWR Alarm

- Customer can set up audio/visual alarm via relay contacts.
- Signal sent to closed loop.

Temperature Monitoring (with alarm)

- One sensor, internal measurement, within Power Meter.
- One sensor, external measurement, to be placed by customer.

General Purpose Inputs (6 ea) Multiple Use

- Track switch closures (assign to interlock group).
- Trigger alarm relay (sends email alert).
- RF presence status/alarm (safety feature).
- Alarm, activated switch.

Accessories:

- Single Channel and Multi-Channel Displays
- RF Digital Dashboard Spreadsheet Software, (Simultaneously Monitor Outputs of 30+ Power Meters)
- PC Based Graphical User Interface Windows XP/7/8/10 Compatible

Accuracy:

- $\pm 2\%$ to Customer Calibration Standard, at preselected frequencies.
- $\pm 5\%$ over a Multi-Octave Bandwidth
- Werlatone Calibration Traceable to (NIST) National Institute of Standards and Technology

Power:

- AC Power Adapter (100/240 50-60 Hertz V AC)
- POE (Passive Over Ethernet, Optional POE Injector Kit Available)
- Via RS485 (Via Single Channel or Multi-Channel Displays)

Interface (Via):

- TCP/IP - SNMP and Browser Interface via Local Area Network
- RS232, Serial
- RS485 - Form Addressable Serial Network
- User ID and Password Protected for Access and Control
- Multiple units can be Networked and Simultaneously Monitored On-Site or Remotely (TCP/IP/SNMP/Serial)

RoHS Compliant Design Available
Custom Connector Configurations Available

Electrical Specifications:

Frequency: 900 - 930 MHz
Power: 5000 W CW

Mechanical Specifications:

Type: Connectorized
Operating Temperature: -55°C to $+75^{\circ}\text{C}$
Storage Temperature: -60°C to $+85^{\circ}\text{C}$

Connector Configurations:

Model	Input(J1)	Output(J2)
WPM11667-83	1 5/8" EIA	1 5/8" EIA


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

J1
INPUT ONLY
FIXED FLANGE



J2
OUTPUT ONLY
SWIVEL FLANGE

REVISION HISTORY

REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	7/6/2020	CS
A	ECN 9965	9/29/2020	CS



VIEW FOR REFERENCE ONLY

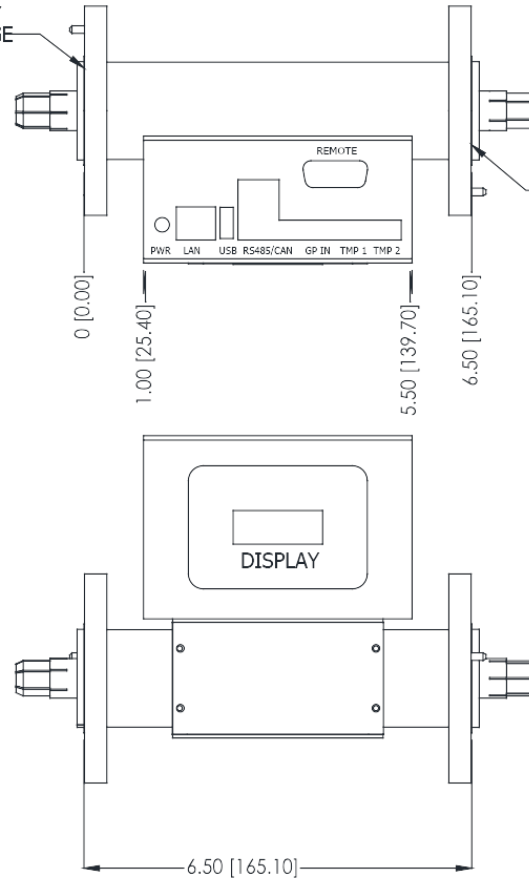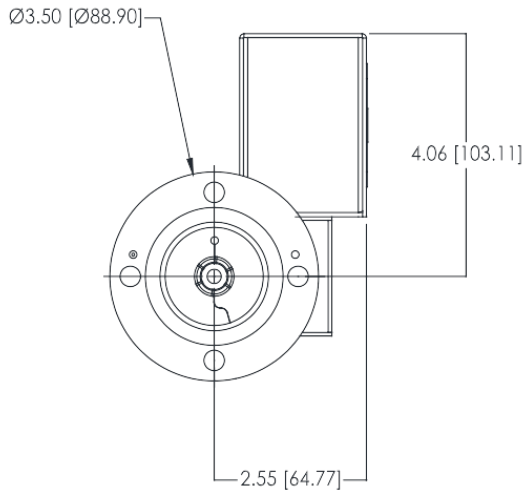

NOTES: UNLESS OTHERWISE SPECIFIED
1. CONNECTORS: J1-J2 1 5/8 (EIA)

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563		
		• INTERPRET DRAWING DAW MSL STD-100		PLP	7/24/2015				
		• CONFORMING PER ASME Y14.3M 2009		CHK	DATE				
		• DIMENSIONAL TOLERANCES FOR REF ONLY		CS	7/6/2020		TITLE		
		• DIMENSIONS ARE IN INCHES (mm)		ENGR			OUTLINE		
		• DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		INGR	DATE		SIZE	CAGE CODE DWG NO	
		• TOLERANCES:		QA	DATE		B 28812	21340-505	
		ANGLES ± 2°		RLSE	DATE	SCALE	1:2		
		2 PL ± .001 (L1)							
		2 PL ± .015 (L1)							
		• REMOVE ALL BURS AND SHARP EDGES 0.01 MAX							
		• CONCENTRICITY MACHINED DIA: .002 FDM							
		• MACHINE TOOL REPAIR .002 MAX							
NEXT ASSY	WPM11073							REV	A
USED ON									
APPLICATION									
		THIRD ANGLE PROJECTION						SHEET 1 OF 1	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com