



PRODUCT DATA SHEET

C3908

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Electrical Specifications:

Frequency: 80 - 1000 MHz
Power: 1500 W CW
Coupling: 50 ± 1.0 dB Max.
Insertion Loss: 0.1 dB Max.
Flatness: ± 0.3 dB Max.
VSWR (ML): 1.20:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 3.0 x 3.0 x 1.09"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C3908-10	N Female	N Female	N Female	N Female
C3908-12	N Female	N Female	SMA	SMA
C3908-13	N Female	N Female	BNC	BNC
C3908-20	7/16 Female	7/16 Female	N Female	N Female
C3908-22	7/16 Female	7/16 Female	SMA	SMA
C3908-23	7/16 Female	7/16 Female	BNC	BNC
C3908-610	N Female	N Male	N Female	N Female
C3908-627	7/16 Female	7/16 Male	N Female	N Female
C3908-712	N Male	N Female	SMA	SMA
C3908-714	N Male	N Female	N Female	N Female
C3908-727	7/16 Male	7/16 Female	N Female	N Female
C3908-728	7/16 Male	7/16 Female	SMA	SMA


(7/16-F Main Line connector option increases size to 3.0 x 3.0 x 1.59")



WERLATONE

Model C3908

Connectorized Directional Couplers

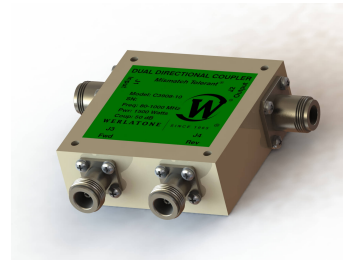


PRODUCT DATA SHEET


C3908

Performance Data (Specifications subject to change without notice):


Coupling:

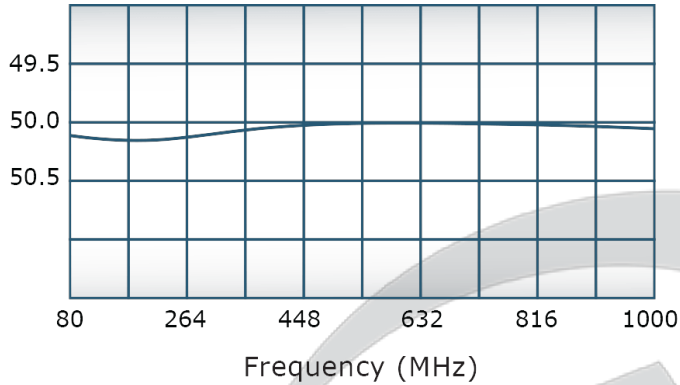


VSWR:

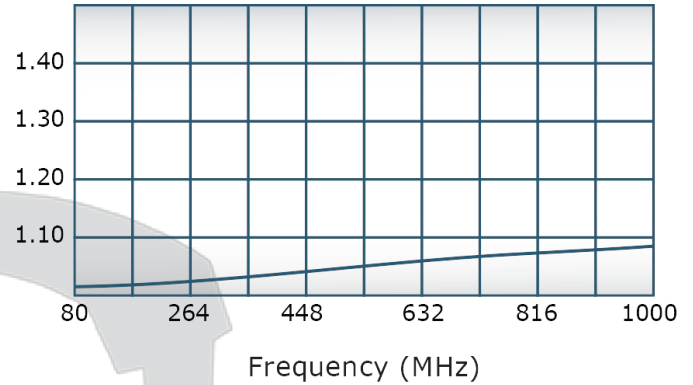

Insertion Loss:

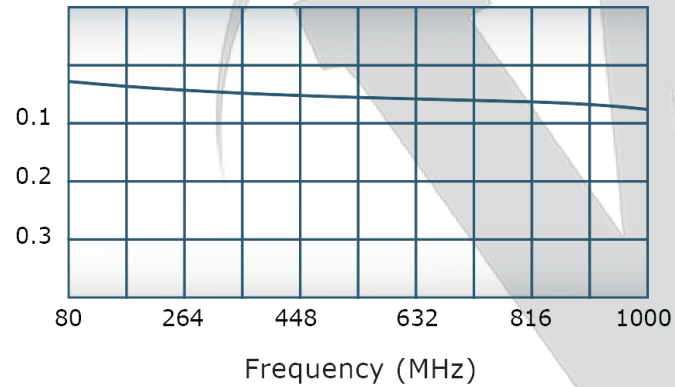


Directivity:

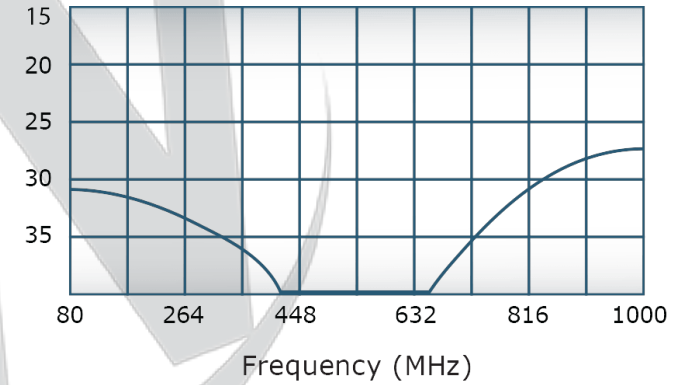

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

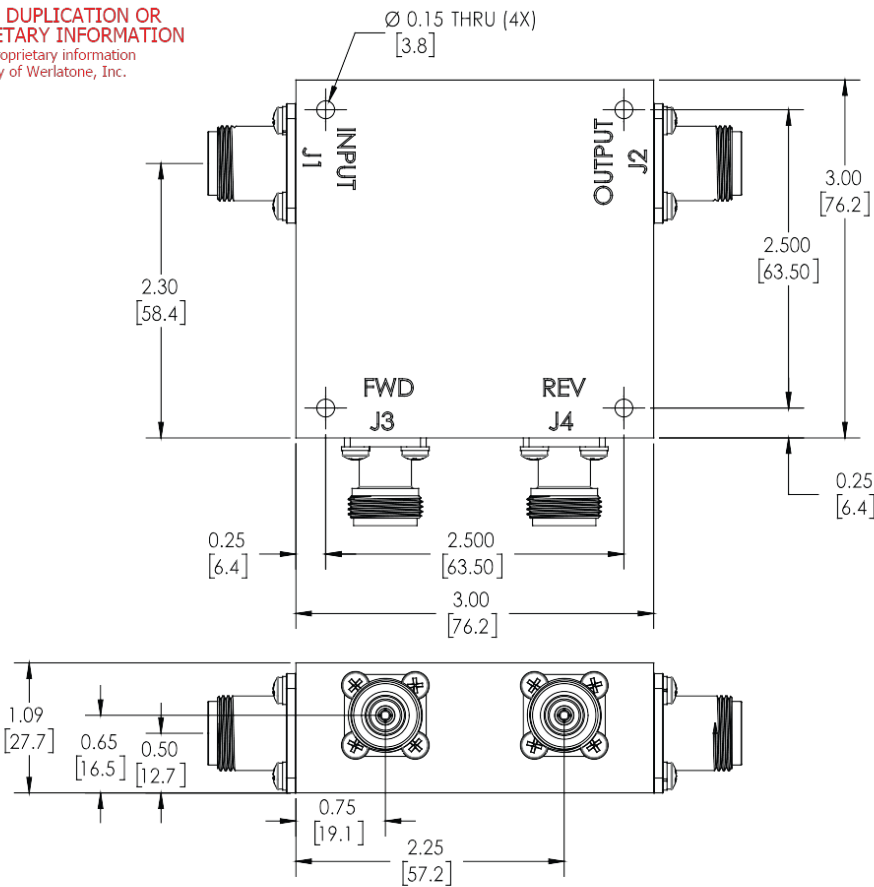

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/27/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL_5541F TYPE I CLASS 3 (YELLOW IRIDITE)**

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE® SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563	
		• INTERPRET DRAWING JAW MIL-STD-100		RH	7/5/2001				
		• DIMENSIONING PER ASME Y14.5M-2009		CHK	DATE	TITLE			
		• PARENTHETICAL INFO FOR REF ONLY		ENGR	DATE				
		• DIMENSIONS ARE IN INCHES		MJ	7/5/2001	OUTLINE			
		• DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		MPGR	DATE				
		• TOLERANCES:		QA	DATE	SIZE	CAGE CODE	DWG NO	REV
		ANGLES: ± 2°		RLSE	DATE	B		10379-505	A
		2 PL. ± .015 [1.3]				SCALE	1:1		
		• REMOVE ALL BURRS AND SHARP EDGES R.01 MAX				SHEET 1 OF 1			
		• CONCENTRICITY MACHINED DIA: .002 FIM							
		• MACHINE TOOL MISMATCH: .003 MAX							
NEXT ASSY		USED ON		THIRD ANGLE PROJECTION 					
APPLICATION									

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com