

PRODUCT DATA SHEET

C5681

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Electrical Specifications:

Frequency: 800 - 2800 MHz
Power: 1000 W CW *
Coupling: 40 ± 1.0 dB Max.
Insertion Loss: 0.2 dB Max.
Flatness: ± 0.75 dB Max.
VSWR (ML): 1.30:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 3.0 x 3.0 x 1.09"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C5681-10	N Female	N Female	N Female	N Female
C5681-12	N Female	N Female	SMA	SMA
C5681-13	N Female	N Female	BNC	BNC
C5681-16	N Male	N Male	SMA	SMA
C5681-20*	7/16 Female	7/16 Female	N Female	N Female
C5681-22*	7/16 Female	7/16 Female	SMA	SMA
C5681-627*	7/16 Female	7/16 Male	N Female	N Female
C5681-712	N Male	N Female	SMA	SMA
C5681-714	N Male	N Female	N Female	N Female
C5681-727*	7/16 Male	7/16 Female	N Female	N Female
C5681-728*	7/16 Male	7/16 Female	SMA	SMA
C5681-7726*	7/16 Male	7/16 Male	N Female	N Female

Unit is de-rated to 500 W CW with N-F mainline connectors.


7/16-F Main Line connector option increases size to 3.0 x 3.0 x 1.59"



WERLATONE

Model C5681

Connectorized Directional Couplers

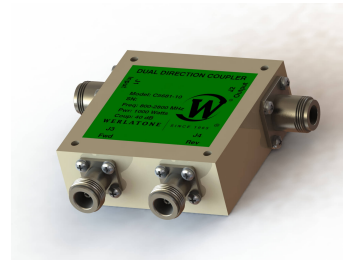


PRODUCT DATA SHEET


C5681

Performance Data (Specifications subject to change without notice):


Coupling:

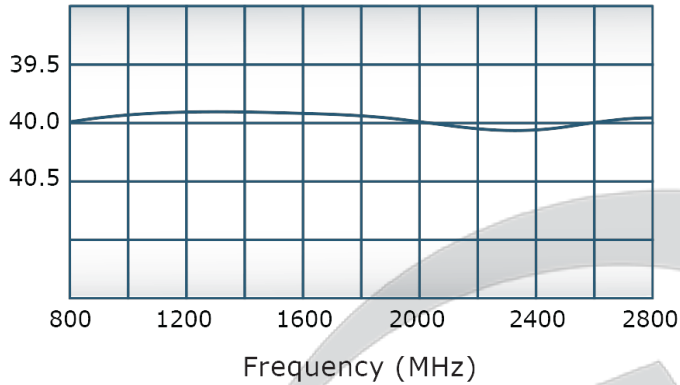


VSWR:

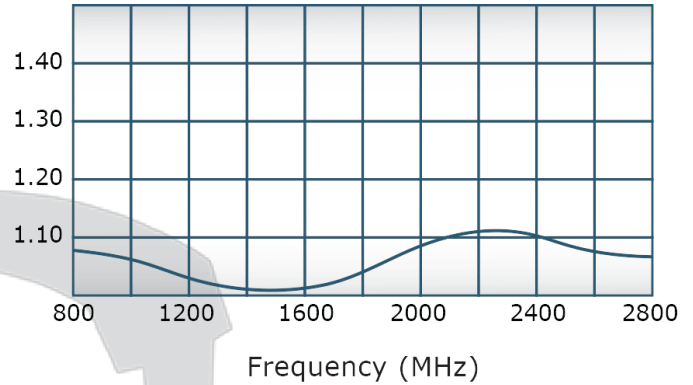

Insertion Loss:

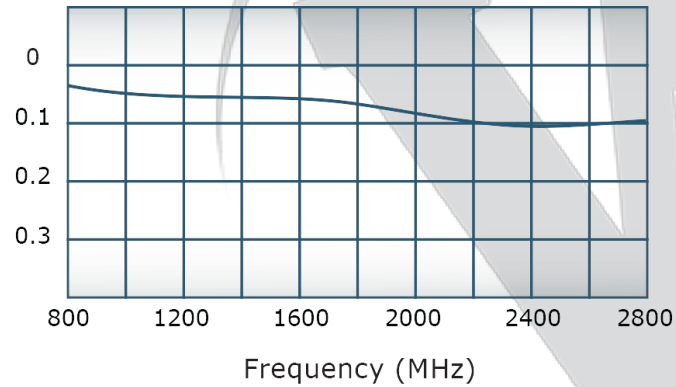


Directivity:

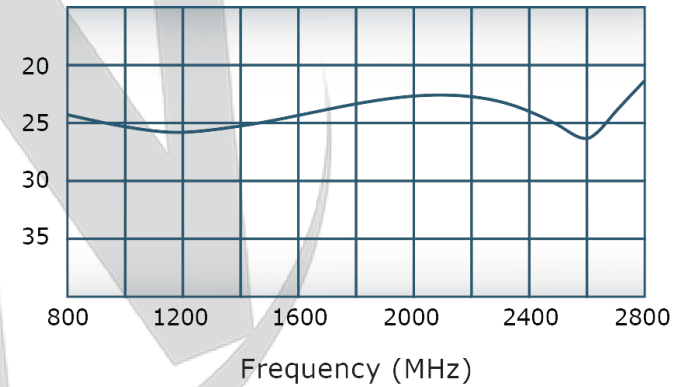

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

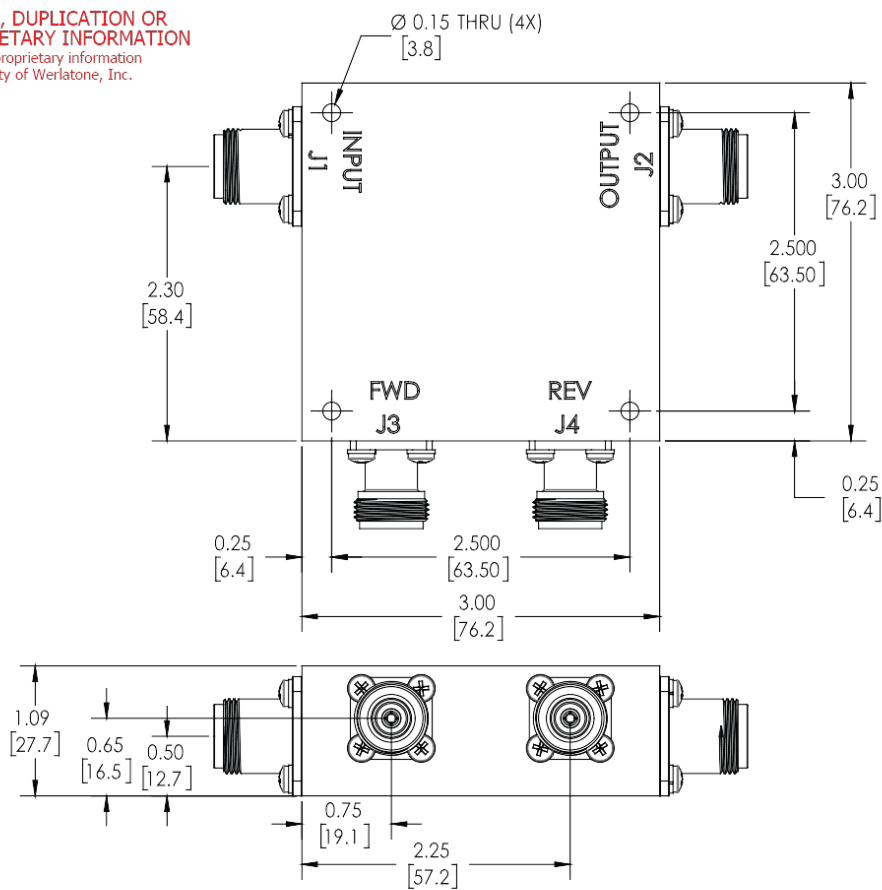

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/27/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE® SINCE 1965	17 Jon Barrett Rd Patterson, NY 12568	
NEXT ASSY	USED ON	• INTERPRET DRAWING AS PER STD-100		RH	7/5/2001		OUTLINE SIZE CAGE CODE DWG NO 10379-505	PH 1 OF 1
		• DIMENSIONING PER ASME Y14.5-2009		CHK	DATE			
		• DIMENSIONAL INFO FOR KEY ONLY		ENGR	DATE			
		• DIMENSIONS ARE IN INCHES		MD	7/5/2001			
		• DIMENSIONAL LIMITS APPLY BEFORE PROCESSES						
		• TOLERANCES:						
		ANGLES ± 2° ± .015 ± .005 (.13) ± .015 ± .015 (.20)						
		• REMOVE ALL BURRS AND SHARP EDGES R.01 MAX		QA	DATE			
		• CONCENTRICITY MAXIMUM DIA. .002 FIM						
		• MACHINE TOOL DEVIATION .002 MAX		RLSE	DATE			
APPLICATION		THIRD ANGLE PROJECTION 		SCALE		1:1	SHEET 1 OF 1	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com