



PRODUCT DATA SHEET

C5710

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 20 - 500 MHz
Power: 400 W CW
Coupling: 40 ± 1.0 dB Max.
Insertion Loss: 0.35 dB Max.
Flatness: ± 0.5 dB Max.
VSWR (ML): 1.30:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 5.20 x 2.68 x 1.69"
Weight: 1.75 lbs.

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C5710-10	N Female	N Female	N Female	N Female
C5710-12	N Female	N Female	SMA	SMA
C5710-13	N Female	N Female	BNC	BNC
C5710-102	SMA	SMA	SMA	SMA


Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C5710

Connectorized Directional Couplers

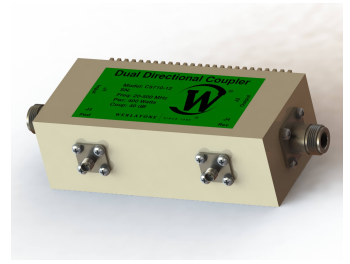


PRODUCT DATA SHEET


C5710

Performance Data (Specifications subject to change without notice):


Coupling:

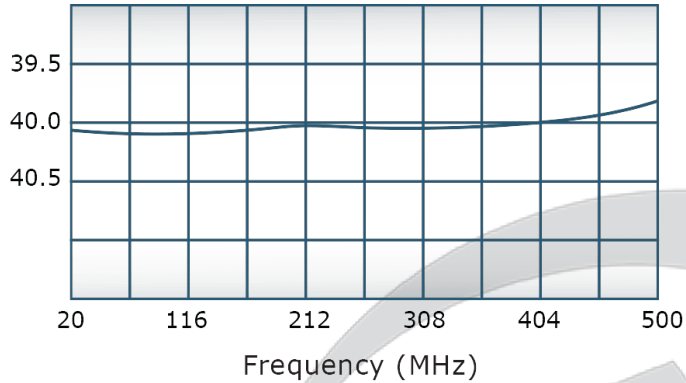


VSWR:

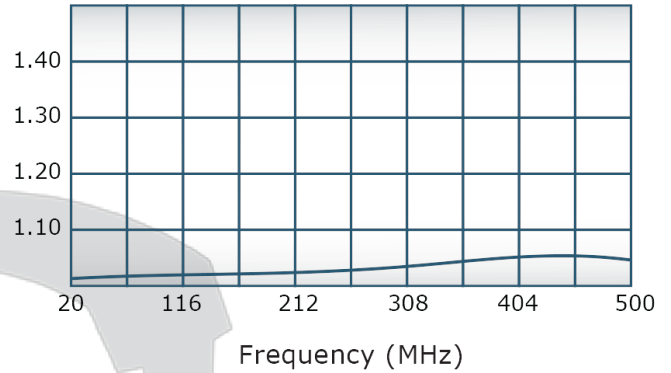

Insertion Loss:

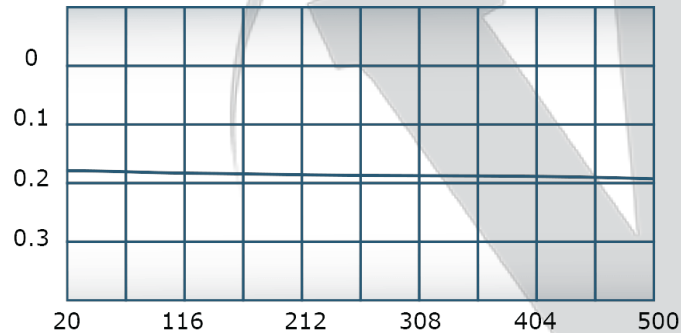

Directivity:

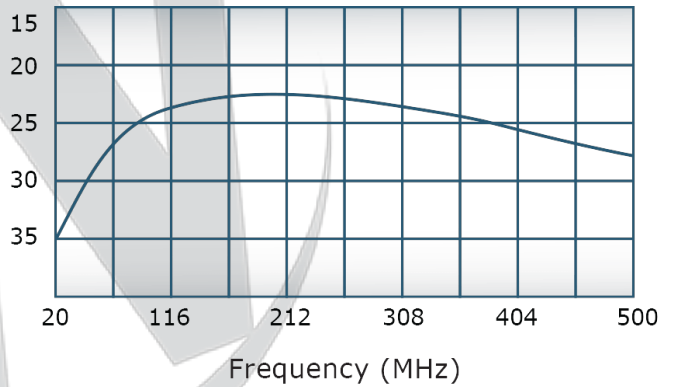


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information which is the sole property of Werlatone, Inc.

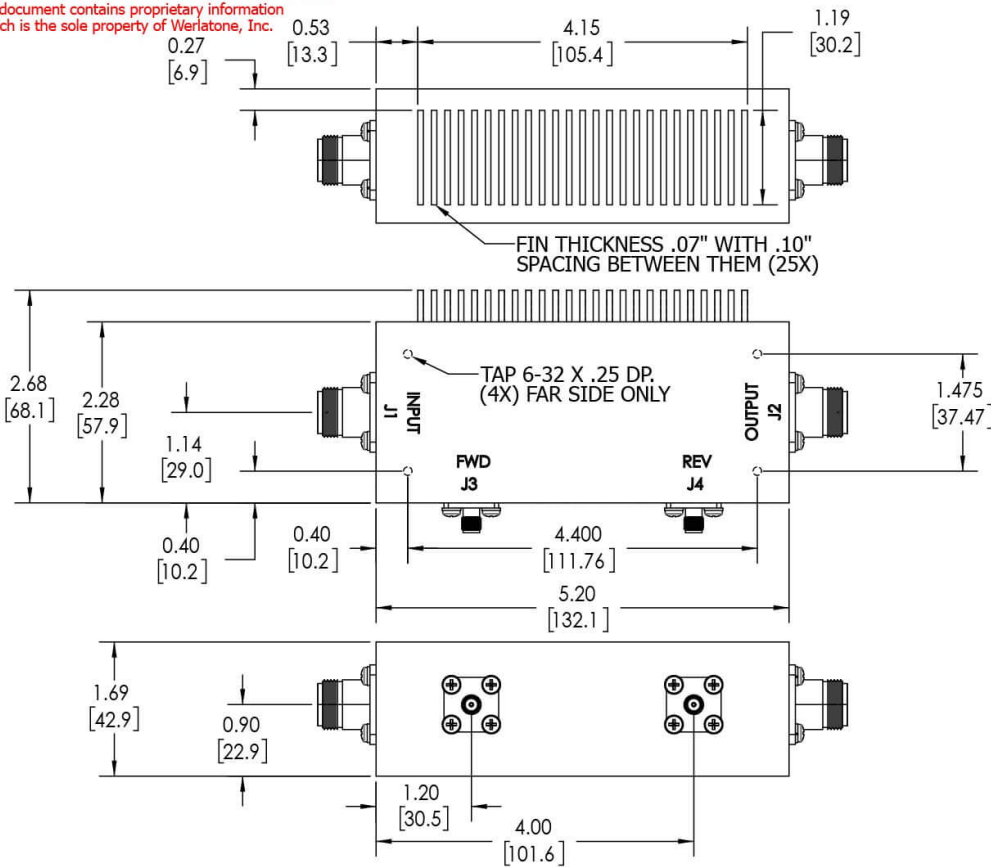

REVISION HISTORY

REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/28/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:**
J1, J2: N FEMALE
J3, J4: SMA FEMALE

UNLESS OTHERWISE SPECIFIED		OWN	DATE	SD		DATE	W		WERLATONE SINCE 1965		17 Jon Barrett Rd	
INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		CHK	DATE	CS		DATE	ENGR		DATE		Patterson, NY 12563	
DIMENSIONS FOR ASME Y14.5M-2009		DATE		BW		DATE	INFR		DATE		TITLE	
PARENTHESES INFO FOR REF ONLY		DATE		QA		DATE	RLSE		DATE		SIZE	
DIMENSIONS ARE IN INCHES		DATE		DATE		DATE	DATE		DATE		CAGE CODE	
DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		DATE		DATE		DATE	DATE		DATE		DWG NO	
TOLERANCES:		DATE		DATE		DATE	DATE		DATE		REV	
ANGLES ± 2°		DATE		DATE		DATE	DATE		DATE		SCALE	
3 PL ± .005 [.13]		DATE		DATE		DATE	DATE		DATE		1:1.5	
2 PL ± .015 [.38]		DATE		DATE		DATE	DATE		DATE		10407-502	
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX		DATE		DATE		DATE	DATE		DATE		SHEET 1 OF 1	
CONCENTRICITY MACHINED DIA. .002 FIM		DATE		DATE		DATE	DATE		DATE		APPLICATION	
MACHINE TOOL MISMATCH .003 MAX		DATE		DATE		DATE	DATE		DATE		THIRD ANGLE PROJECTION	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com