

PRODUCT DATA SHEET

C6504

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 123 - 133 MHz
Power: 2250 W CW
Coupling: 50 ± 1.0 dB Max.
Insertion Loss: 0.15 dB Max.
Flatness: ± 0.5 dB Max.
VSWR (ML): 1.20:1 Max.
Directivity: 25 dB Min.


Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 6.0 x 3.0 x 1.09"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C6504-22	7/16 Female	7/16 Female	SMA	SMA
C6504-728	7/16 Male	7/16 Female	SMA	SMA

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

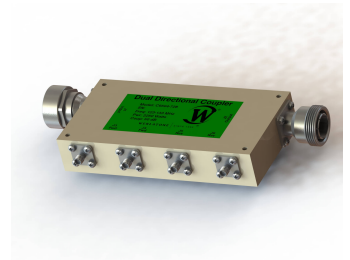


PRODUCT DATA SHEET


C6504

Performance Data (Specifications subject to change without notice):


Coupling:

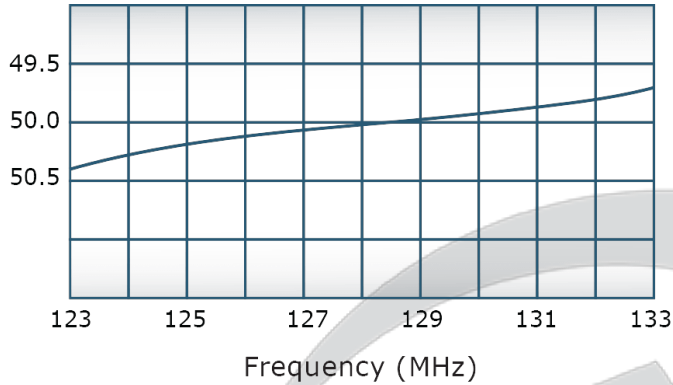


VSWR:

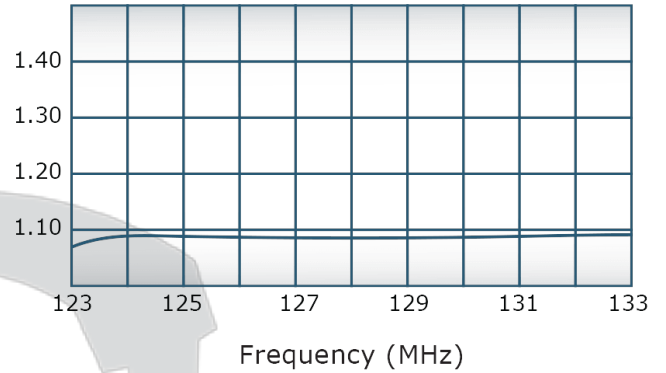

Insertion Loss:

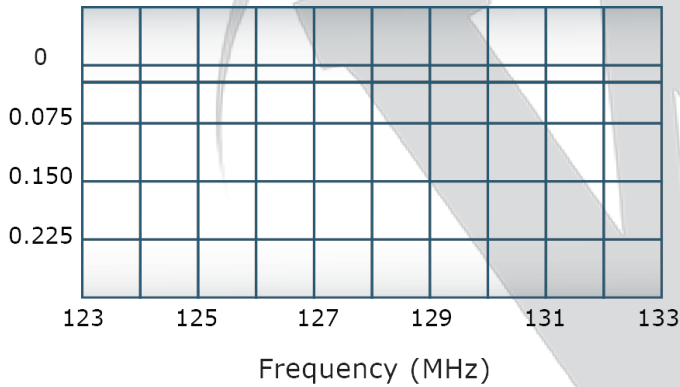

Directivity:

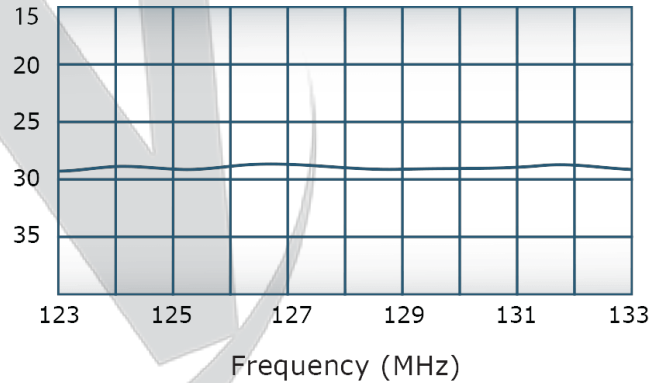


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

This document contains proprietary information
which is the sole property of Werlatone, Inc.

REV.	REVISION RECORD	DATE	APPROVED
A	ECN 2034	6/12/2001	CS
B	ECN 9696	6/18/2019	RB

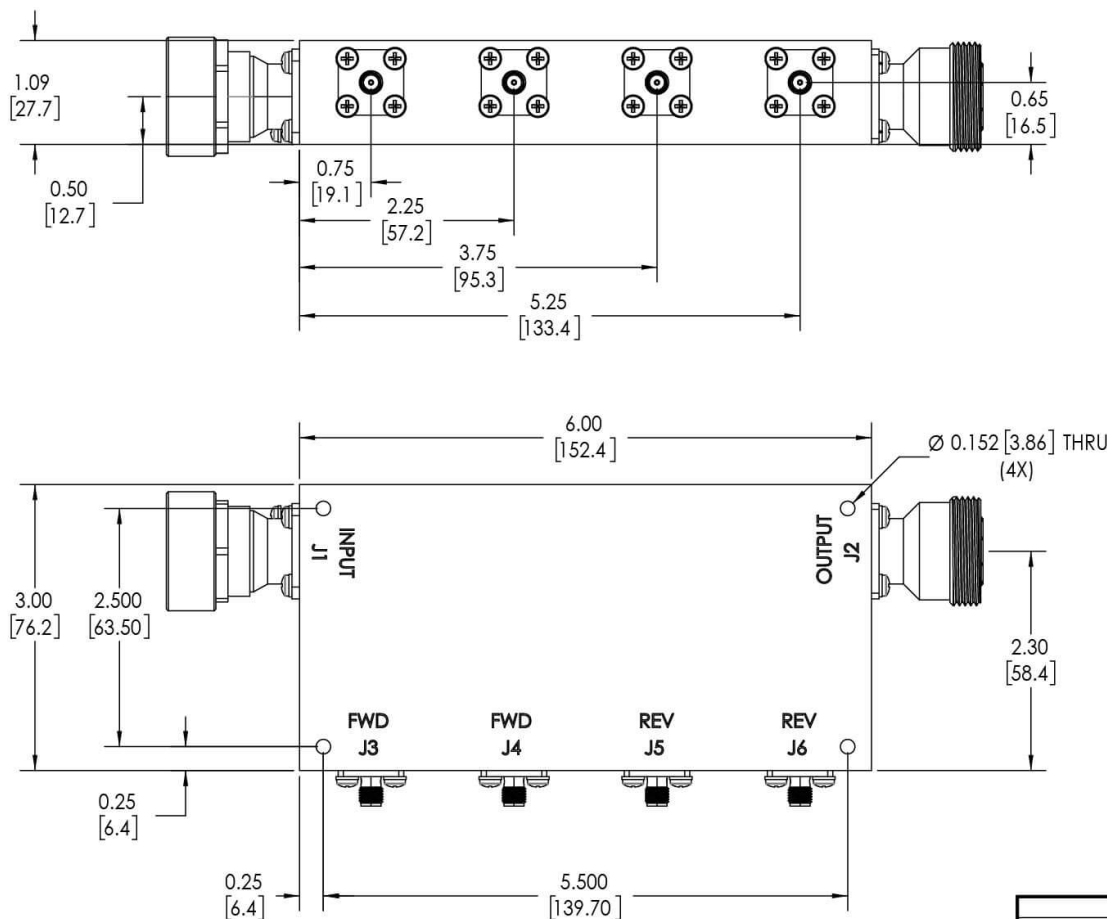

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIAL: ALUMINUM 6061-T6**
- 2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- 3. CONNECTORS:**
 - J1: 7/16 MALE**
 - J2: 7/16 FEMALE**
 - J3-J6: SMA FEMALE**

UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING IN ACCORDANCE WITH DIMENSIONS FOR PERIODS 14-18 MAY 2009 DIMENSIONAL TOLERANCES FOR BEST FIT DIMENSIONS ARE IN INCHES DIMENSIONAL LIMITS APPLY BEFORE PROCESSES TOLERANCES: ANGLES = $\pm 1^\circ$ 3 PL. $\pm .005$ [13] 2 PL. $\pm .015$ [30] REMOVE ALL BURRS AND SHARP EDGES 8.01 MAX CONCENTRICITY MACHINED DIA. .002 FPM MACHINE TOOL RESTRAINED .001 MAX		DWN DATE SD 6/18/2019 CHR DATE CS 6/18/2019 ENGR DATE REGR DATE QA DATE RLSE DATE	 WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563
NEXT ASSY USED ON APPLICATION	THIRD ANGLE PROJECTION	TITLE OUTLINE SIZE CAGE CODE DWG NO SCALE: 1:25 10750-505		REV B
		SHEET 1 OF 1		

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com