

PRODUCT DATA SHEET

C7008

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 20 - 180 MHz
Power: 100 W CW
Coupling: 10 ± 1.0 dB Max.
Insertion Loss: 1.0 dB Max.
Flatness: ± 0.5 dB Max.
VSWR (ML): 1.25:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 5.0 x 2.0 x 1.5"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C7008-10	N Female	N Female	N Female	N Female
C7008-12	N Female	N Female	SMA	SMA
C7008-13	N Female	N Female	BNC	BNC
C7008-102	SMA	SMA	SMA	SMA


Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C7008

Connectorized Directional Couplers

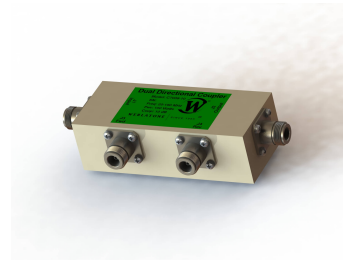


PRODUCT DATA SHEET


C7008

Performance Data (Specifications subject to change without notice):


Coupling:

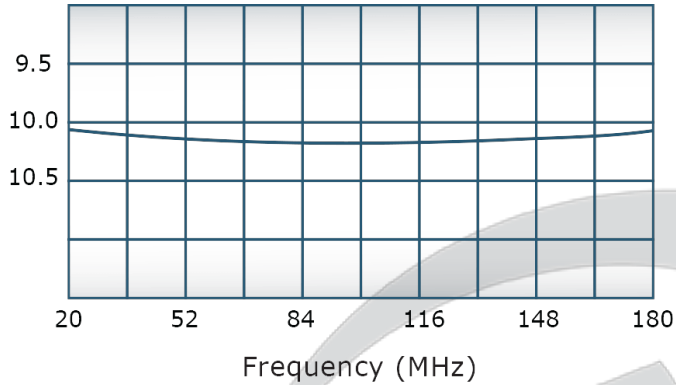


VSWR:

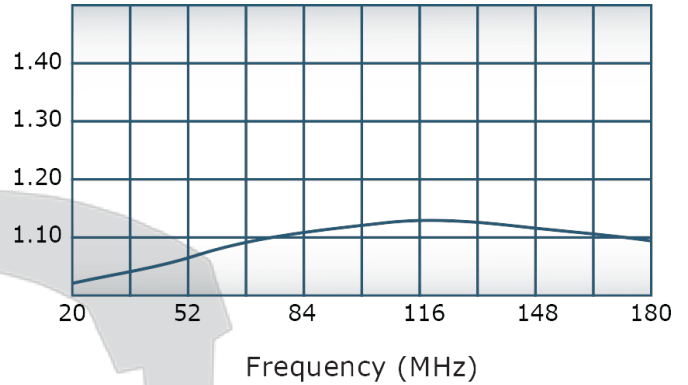

Insertion Loss:

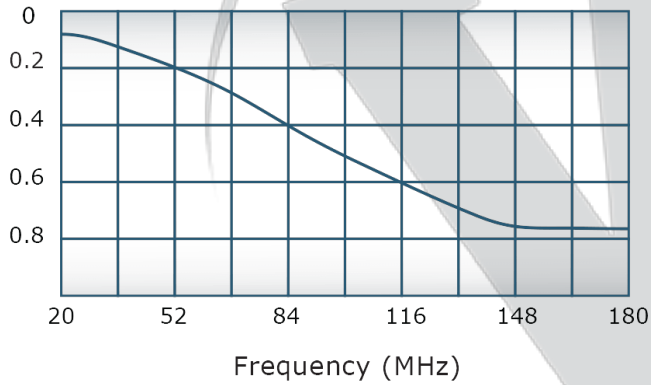

Directivity:

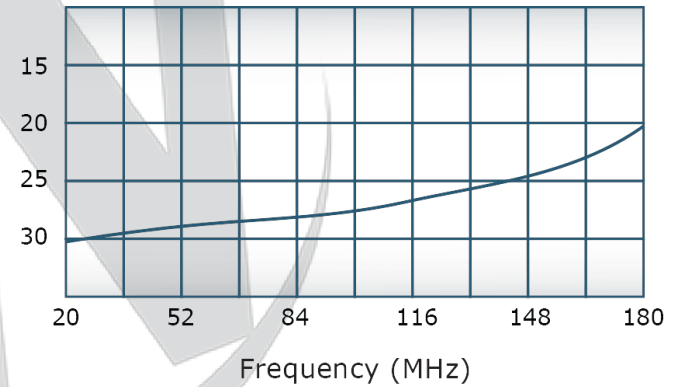


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	6/12/2019	RB

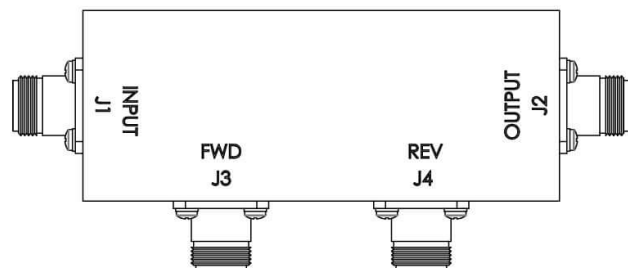

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)
3. CONNECTORS:
J1-J4: N FEMALE

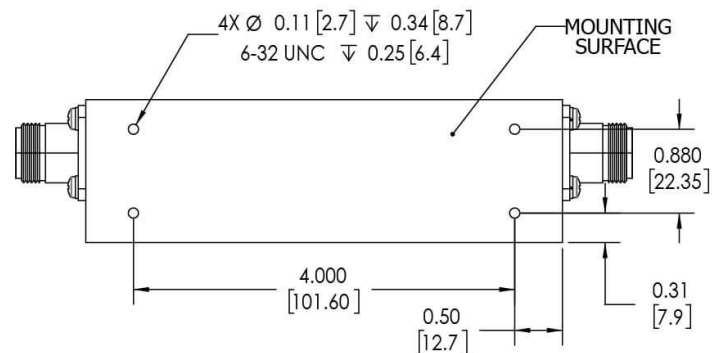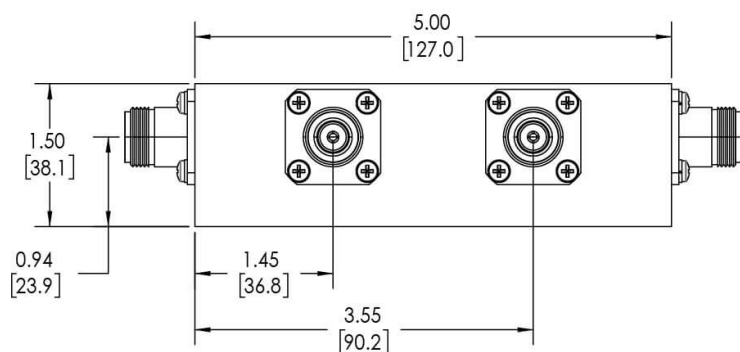

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE [®] SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563		
		INTERPRET DRAWING IN ACC. WITH STD-100		SD	6/12/2019				
		DIMENSIONING PER ASME Y14.5-2009		CHK	DATE				
		PARENT/CHILD DWG FOR BEST COPY		CS	6/12/2019				
		DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		ENGR	DATE	TITLE			
		TOLERANCES:		REFR	DATE	OUTLINE			
		ANGLES = 2° 3 PL. ± .005 [13] 2 PL. ± .015 [30]		QA	DATE		SIZE	CAGE CODE	DWG NO
		REMOVE ALL BURRS AND SHARP EDGES R.01 MAX CONCENTRICITY MACHINED DIA. .002 PAK MACHINE TOOL RESTRACTION .000 MAX		RLSE	DATE		SCALE	10888-500	
NEXT ASSY	USED ON	THIRD ANGLE PROJECTION 				1:25	SHEET 1 OF 1		
APPLICATION									

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com