



PRODUCT DATA SHEET

C7646

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 1 - 500 MHz
Power: 30 W CW
Coupling: 20 ± 1.0 dB Max.
Insertion Loss: 3.0 dB Max.
Flatness: ± 1.0 dB Max.
VSWR (ML): 1.30:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 5.2 x 2.67 x 1.69"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C7646-10	N Female	N Female	N Female	N Female
C7646-12	N Female	N Female	SMA	SMA
C7646-13	N Female	N Female	BNC	BNC
C7646-102	SMA	SMA	SMA	SMA
C7646-200	BNC	BNC	BNC	BNC

* Insertion Loss includes 0.08 dB Coupling Loss.

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition.



WERLATONE

Model C7646

Connectorized Directional Couplers




PRODUCT DATA SHEET


C7646

Performance Data (Specifications subject to change without notice):


Coupling:

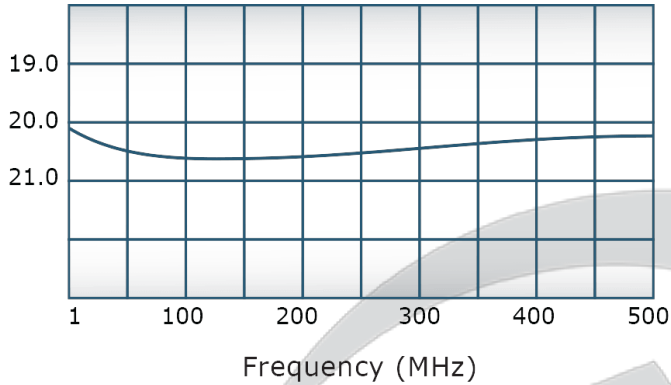


VSWR:

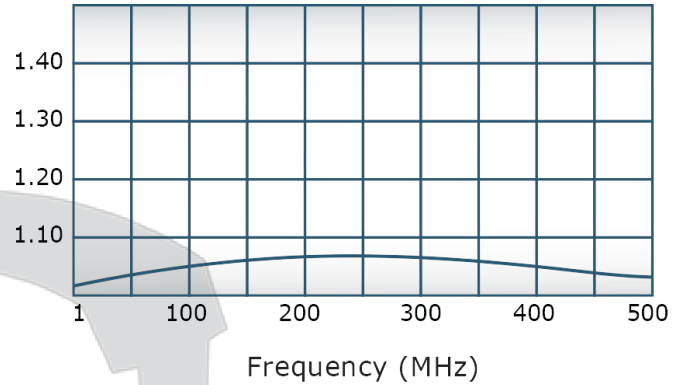

Insertion Loss:

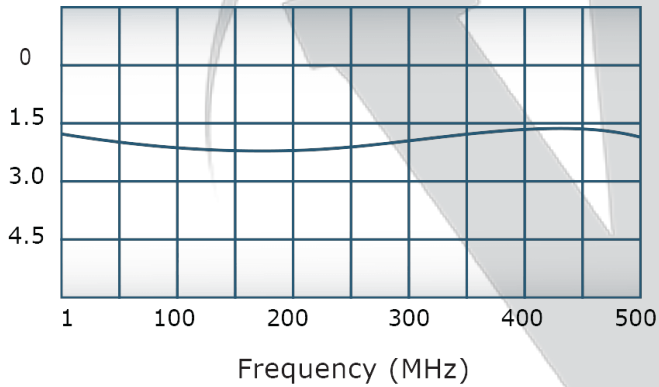

Directivity:

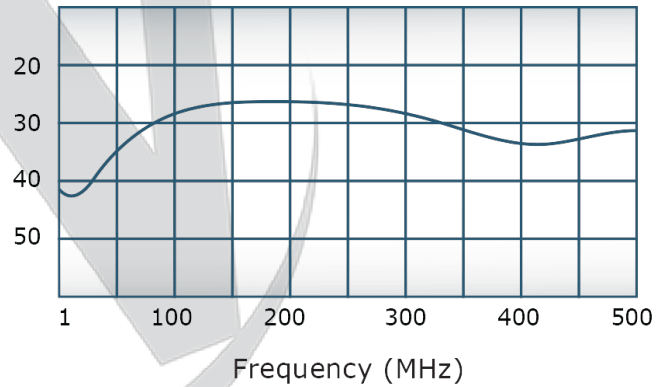

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/28/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:**
J1-J4: SMA FEMALE

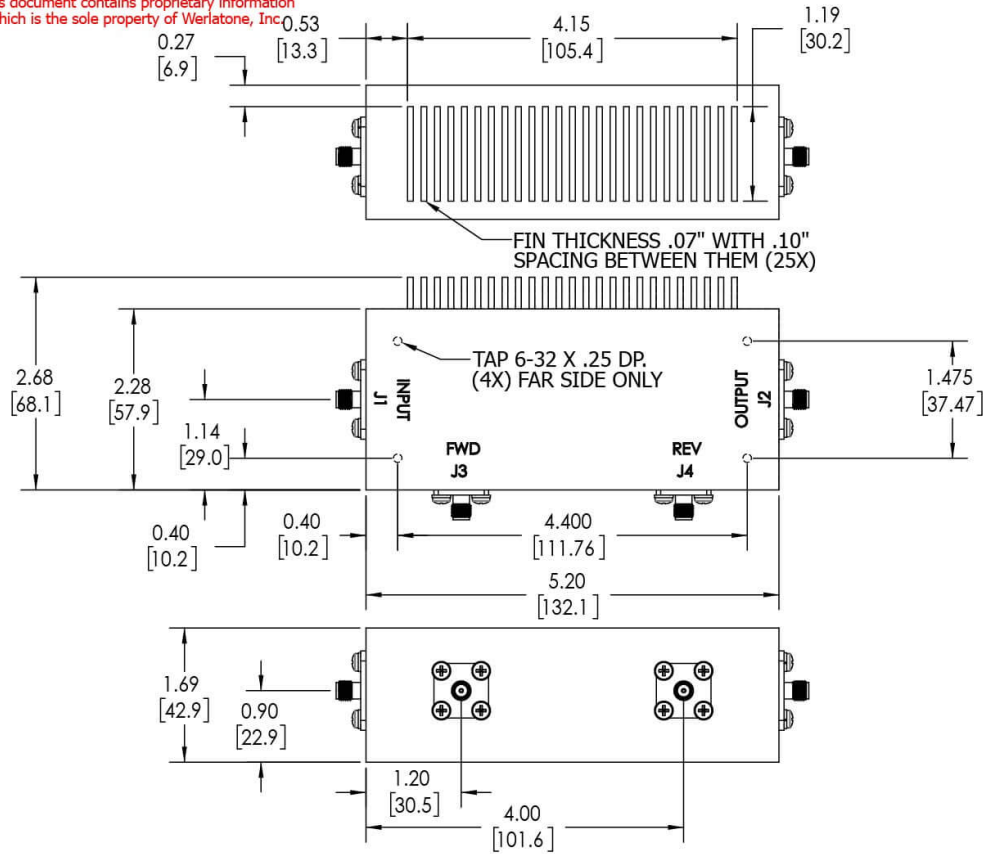

UNLESS OTHERWISE SPECIFIED		OWN	DATE	17 Jon Barrett Rd Patterson, NY 12563	
INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		SD	2/11/2019	 WERLATONE SINCE 1965	
DIMENSIONS FOR ASME Y14.5M-2009		CHK	DATE		
PARENTHESES ARE IN INCHES		CS	2/11/2019	OUTLINE	
DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		ENGR	DATE		
TOLERANCES:		BW	9/13/1996	SIZE	CAGE CODE
ANGLES ± 2°		INFR	DATE	B	10407-501
3 PL ± .005 [.13]		QA	DATE	DWG NO	REV
2 PL ± .015 [.38]		RLSE	DATE	1:1.5	A
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX		THIRD ANGLE PROJECTION			
CONCENTRICITY MACHINED DIA. .002 FIM		SHEET 1 OF 1			
MACHINE TOOL MISMATCH .003 MAX					

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com