

PRODUCT DATA SHEET

C8722

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 250 - 1000 MHz
Power: 200 W CW
Coupling: 40 ± 1.0 dB Max.
Insertion Loss: 0.2 dB Max.
Flatness: ± 0.3 dB Max.
VSWR (ML): 1.20:1 Max.
Directivity: 20 dB Min.


Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 3.0 x 3.0 x 1.09"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C8722-10	N Female	N Female	N Female	N Female
C8722-12	N Female	N Female	SMA	SMA
C8722-13	N Female	N Female	BNC	BNC
C8722-102	SMA	SMA	SMA	SMA
C8722-302	TNC Female	TNC Female	SMA	SMA

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




PRODUCT DATA SHEET


C8722

Performance Data (Specifications subject to change without notice):


Coupling:

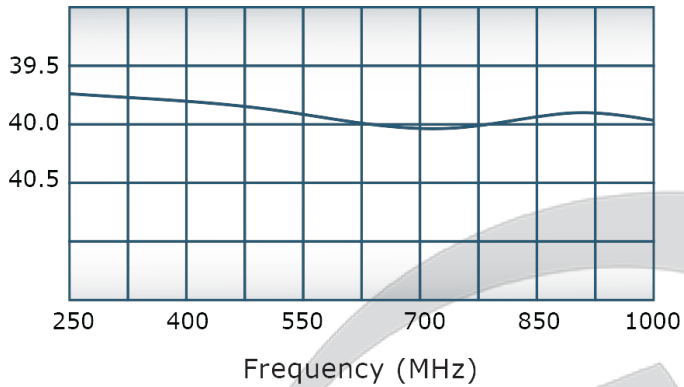


VSWR:

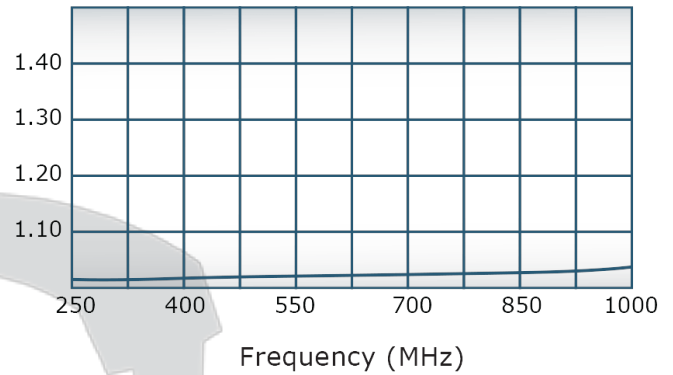

Insertion Loss:

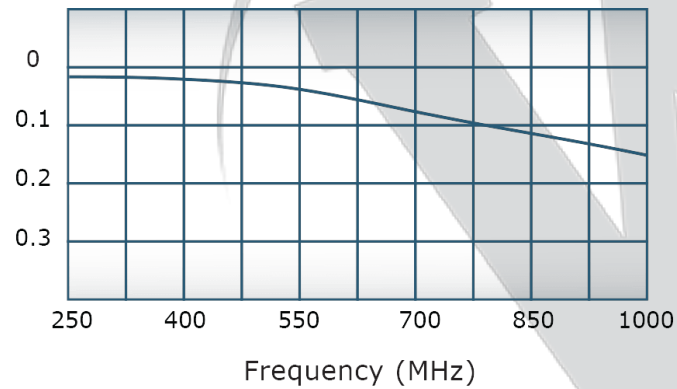


Directivity:

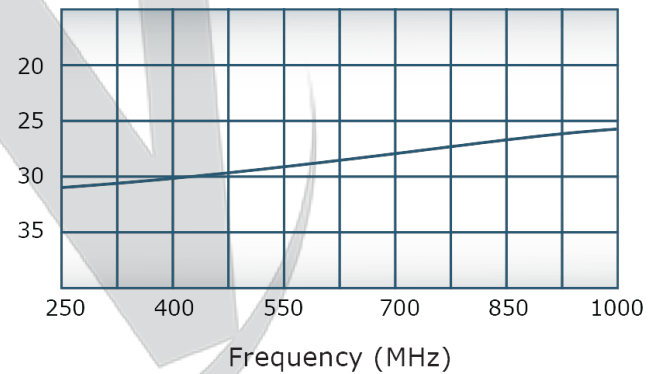

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

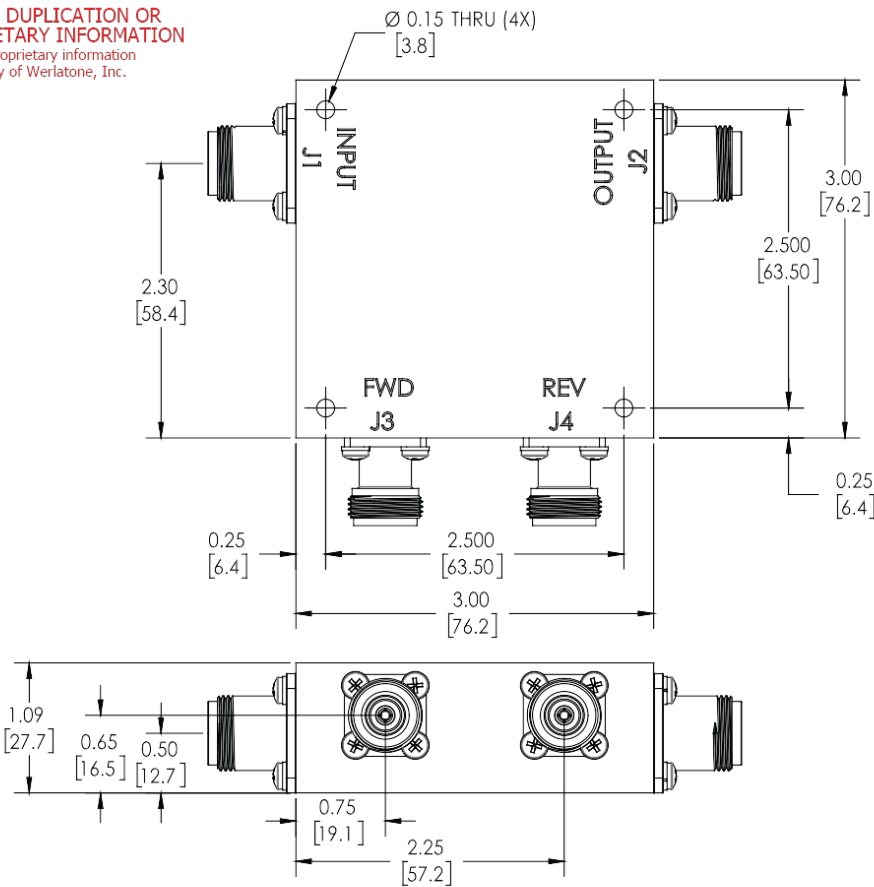

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/27/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL_5541F TYPE I CLASS 3 (YELLOW IRIDITE)**

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	17 Jon Barrett Rd Patterson, NY 12563	
		• INTERPRET DRAWING JAW MIL-STD-100		RH	7/5/2001	WERLATONE SINCE 1965	
		• DIMENSIONING PER ASME Y14.5M-2009		CHK	DATE		
		• PARENTHETICAL INFO FOR REF ONLY		ENGR	DATE	TITLE OUTLINE	
		• DIMENSIONS ARE IN INCHES		MJ	7/5/2001		
		• DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		MPGR	DATE	SIZE	CAGE CODE
		• TOLERANCES:		QA	DATE	B	10379-505
		ANGLES: ± 2°		RLSE	DATE	SCALE	1:1
		2 PL. ± .015 [1.3]		THIRD ANGLE PROJECTION		SHEET 1 OF 1	
		• REMOVE ALL BURS AND SHARP EDGES R.01 MAX					
		• CONCENTRICITY MACHINED DIA: .002 FIM					
		• MACHINE TOOL MISMATCH: .003 MAX					
NEXT ASSY	USED ON						
APPLICATION							

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com