



PRODUCT DATA SHEET

D10271

Werlatone® Mismatch Tolerant® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

Features:

High Power

Wide Bandwidths

Small Size

Custom Designs Available

Electrical Specifications:

Type: 2-Way Combiner/Divider (60/40 Split)
Frequency: 140 - 180 MHz
Power: 500 W CW, 8 kW Peak
Insertion Loss: 0.4 dB Max.
VSWR: 1.30:1 Max.
Phase Balance: ± 5° Max.
Amplitude Balance: ± 0.3 dB Max.
Isolation: Non-Isolated

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F Type II
Class 3 (Clear Iridite) RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Weight: 29 ounces
Size: 6.0 x 5.0 x 1.06"

Connector Configurations:

Model	Sum Port (J1)	Input/Output (J2)	Input/Output (J3)
D10271-10	N Female	N Female	N Female

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

4

3

2

1

**RESTRICTION ON USE, DUPLICATION OR
DISCLOSURE OF PROPRIETARY INFORMATION**
This document contains proprietary information
which is the sole property of Werlatone, Inc.

REVISION HISTORY

REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL P/N EAS	3/16/2015	3-W

B


B

→

→

A

A

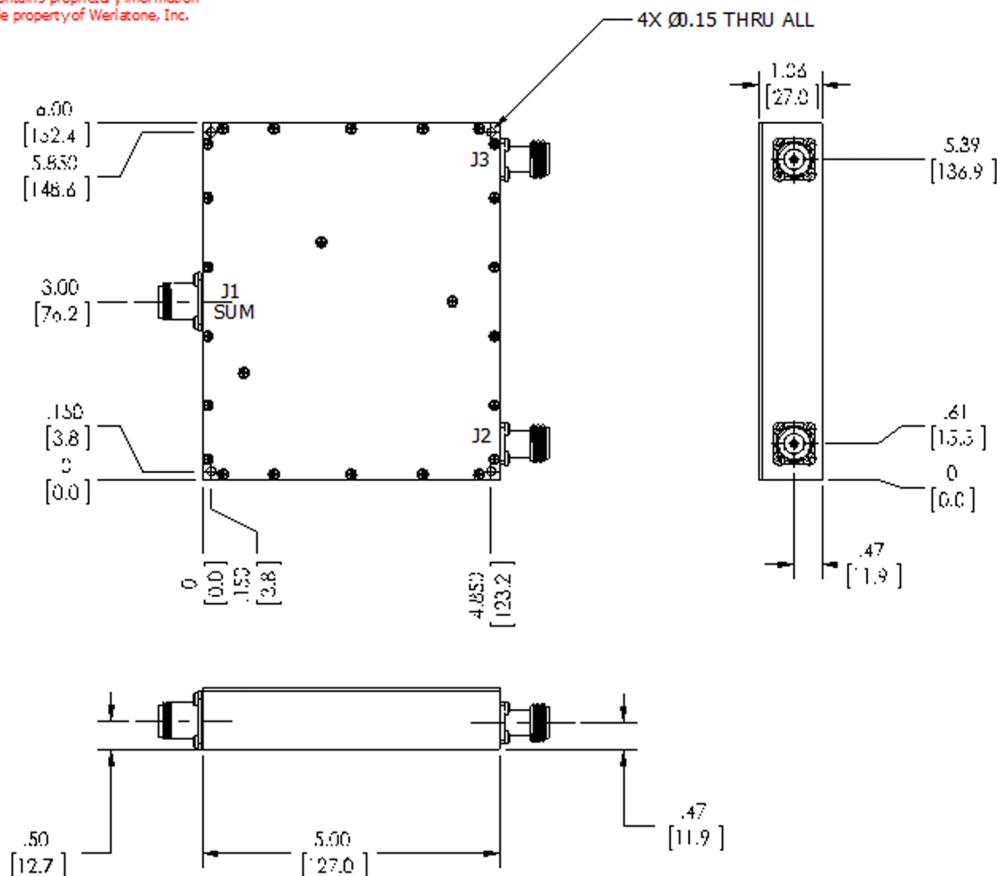

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE 2 CLASS 3 (CLEAR)
3. CONNECTORS: ALL N (FEMALE)

UNLESS OTHERWISE SPECIFIED	REV.	DATE	WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563
INTERFERENT DRAWINGS ARE FOR INFORMATION ONLY	PLP	3/13/2015		
ALL MATERIALS ARE TO BE USED AS RECEIVED	CHK	DATE		
ALL MATERIALS ARE TO BE USED AS RECEIVED	NM	3/16/2015	TITLE	
ALL MATERIALS ARE TO BE USED AS RECEIVED	TRK	DATE		
ALL MATERIALS ARE TO BE USED AS RECEIVED	PLR	DATE		
ALL MATERIALS ARE TO BE USED AS RECEIVED	QA	DATE	SIZE	12308-500
ALL MATERIALS ARE TO BE USED AS RECEIVED			CAGE CODE	28812
ALL MATERIALS ARE TO BE USED AS RECEIVED			DRAWING NO.	
ALL MATERIALS ARE TO BE USED AS RECEIVED			REV.	-
ALL MATERIALS ARE TO BE USED AS RECEIVED			SCALE	1:2
ALL MATERIALS ARE TO BE USED AS RECEIVED			SHEET	1 OF 1

4

3

4

2

1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com